

CSP3 Series

5CCT LED Flush Mount Wet Location


Fixture Type:
Project Name
Location:
Date:

Features

- Ultra bright 24 watt 13 inch LED flush mount downlight .
- Wet location suitable. Designed to withstand moisture and water exposure, making it ideal for outdoor spaces, bathrooms, kitchens, and other moisture-prone areas.
- With a sleek 0.98 inch thickness, this light is not only stylish but also incredibly energy-efficient, offering a remarkable 80% more energy savings compared to traditional halogen lamps.
- Equipped with high-quality LEDs, this downlight provides brilliant lighting, make it ideal for both residential and commercial space.
- Design for easy flush mount installation, this downlight is suitable for J-box with a diameter of 2.75 inch or 3.5 inch, ensuring a hassle-free installation process.
- 5CCT color temperatures adjustable, allowing you to adjust the color temperatures according to your preference and create the perfect ambiance for any occasion.



Dimensions

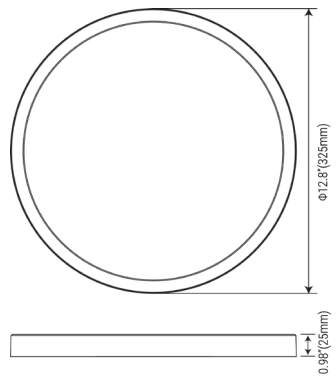

Specification

Material	Aluminum	Efficacy	Up to 90 lm/W
Lens	Polycarbonate Lens	LED Life Span	50,000 hrs
Beam angle	120 degree	Dimmable	Triac Dimming
IColor Temp	5CCT 2700K/3000K/3500K/4000K/5000K	Lumen Package	1,976lm - 2,106lm
CRI	90	Warranty	5 Years
Input Voltage	120V	Ambient Operation Temperature	-20°C (-4°F) ~45° C(113°F)
Installation	Flush Mount	Listing	ETL Wet Location




CSP3 Series

LED Flush Mount Wet Location Wattage Selectable and 5CCT

Fixture Type:
Project Name
Location:
Date:

Ordering Guide

Example: CSP3-24W13IN5CCT

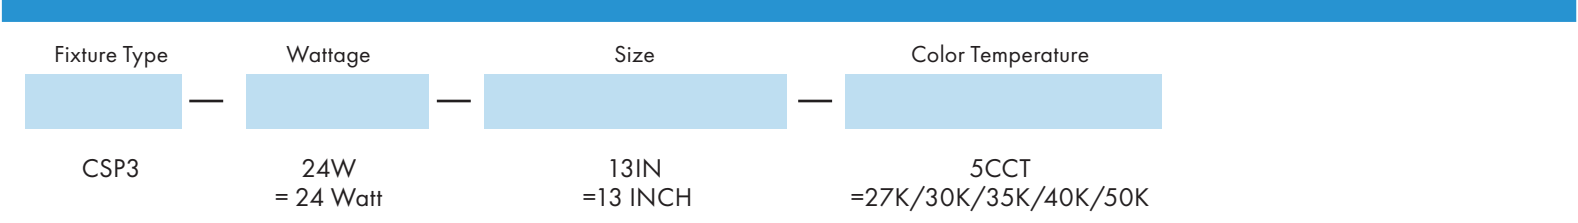

CSP3 Series

LED Flush Mount Wet Location Wattage Selectable and 5CCT

Fixture Type:

Project Name

Location:

Date:

Product Information

WATTAGE	2700K		3000K		3500K		4000K		5000K	
	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
24W	1976 lm	82 lm/W	2013 lm	83lm/W	2116 lm	88lm/W	2161 lm	90lm/W	2106 lm	87lm/W

Die-cast trim

Precision casting, excellent heat dissipation, high corrosion; lamp thickness only 0.98".




Color temperature optional

2700K-5000K



Mounting bracket

With multiple apertures, can be installed into any 2.75 or 3.5inch junction box.

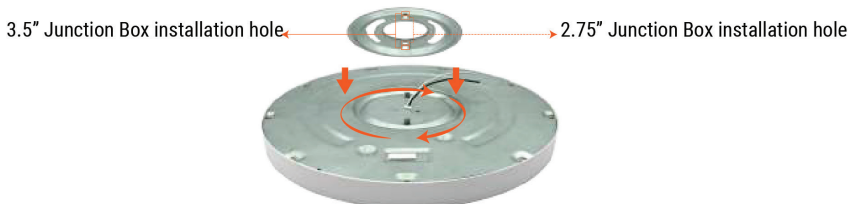

Installation Bracket

Rotating installation bracket, easy to install.

