

Fixture Type:

Project Name:

Location:



Date:

Features

- Rugged die cast aluminum housing with dark bronze polyester powder coat finish
- Sealed design with silicone strip for use in wet location
- High efficiency and lumen output
- 1-10V dimming driver
- 120 degrees lens
- Standard 5 ft power cord, extension power whip cable available
- Hook mount/pendant mount with 3/4" conduit size
- Compatible with motion sensor



Dimension

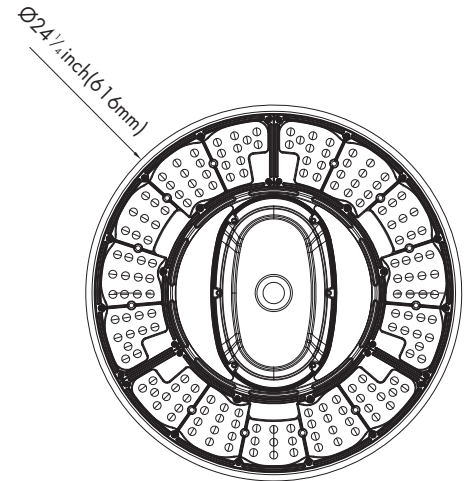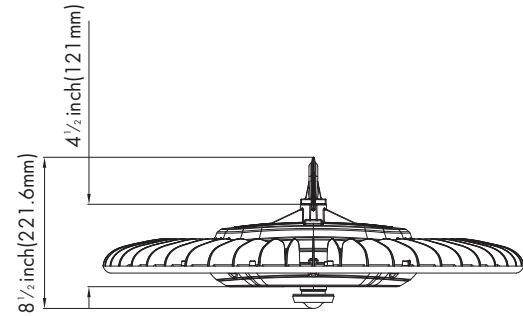

Product Performance Standard

Size	8 1/2" X L Ø24 1/4"	Power Factor	≥90%
Weight	16 lb	LED lifespan	100,000 Hrs
Color Temp	4000K - 5000K	Dimmable	1-10V Dimming
CRI	80	Warranty	10 Years
Input Voltage	120-277V/348-480V	Ambient Operation Temperature	-40C° (-40°F) ~55C° (131°F)

Ordering Guide Example: LED3MHB 250W 50K

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Optional Accessories
LED3MHB	250W	40K=4000K	Blank = 120-277V	Blank =Dark Bronze	Blank = No Accessories
	340W	50K=5000K	HV = 347-480V		¹ MS = Motion Sensor (BL-823PIR-IN)

Notes:1. Motion sensor is not available for the 347-480V.

Fixture Type:

Project Name:

Location:

Date:

Product Information

	4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
250W	40000lm	160lm/W	40100lm	160lm/W
340W	54300lm	160lm/W	55500lm	160lm/W

Optional Accessories



PIR Motion Sensor

-SKU: BL-823PIR-IN

-Internal photocell is field installed or pre-installed by request.



Microwave Motion Sensor

-SKU: BL-810BD-MCW

-Internal photocell is field installed or pre-installed by request.

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories