

# WCS41 Series



FIXTURE TYPE:  
PROJECT NAME:  
LOCATION:  
DATE:


LED WALL CYLINDER DOWNLIGHT  
ONLY WATTAGE SELECTABLE AND 5CCT



## Dimensions

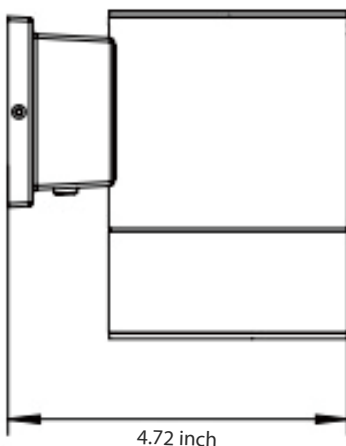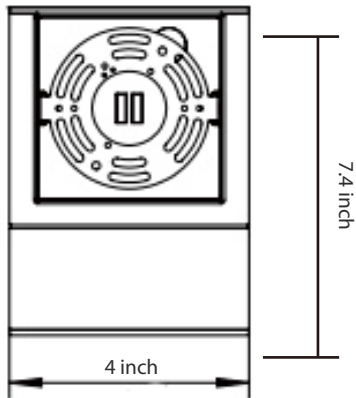

## Specification

Material	Rugged cast aluminum housing
Lens	Polycarbonate Lens
Beam Angle	60 degree
Color Temp	5CCT 2700K/3000K/3500K/4000K/5000K
CRI	70
Input Voltage	110-277V
Installation	Wall mount
Efficacy	Up to 100 lm/W
LED Lifespan	50,000 hrs
Dimmable	0-10V Dimming
Lumen Package	600 lm to 1,300 lm
Warranty	5 Years
Ambient Operation Temperature	-20° C(-4°F)~ 45°C (113°F)
Listing	ETL, IP65

# WCS41 Series

FIXTURE TYPE:  
PROJECT NAME:  
LOCATION:  
DATE:


LED WALL CYLINDER DOWNLIGHT  
ONLY WATTAGE SELECTABLE AND 5CCT

## Features


- A perfect blend of elegance and efficiency LED wall cylinder, offers superior brightness and energy efficiency compared to traditional lighting solution.
- 4" round head sizes with down light options, catering to various aesthetic preferences and spatial requirements.
- Wattage selectable and 5CCT adjustable that suits your lighting needs, ensuring optimal brightness and energy efficiency. 60 degree beam angle provides a wide and even light distribution, minimizing shadows and dark spots for a well lit environment.
- Optional emergency battery backup , providing additional safety.
- Suitable for wet location.

## Ordering Guide

Example: WCS41-5CCT-BK-EM-PC

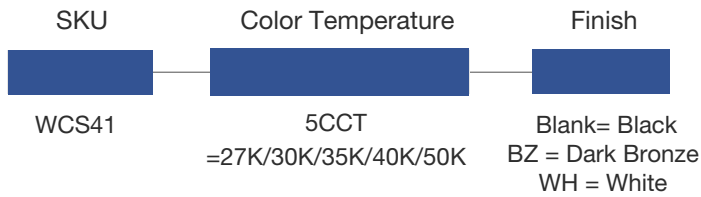

## Optional Accessories

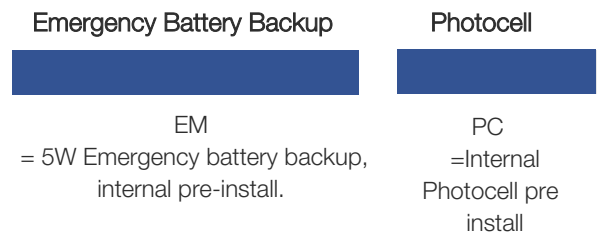

## Performance Data

	5000K	
WATTAGE	LUMEN	EFFICACY
7W	700lm	100 lm/W
10W	1000lm	100 lm/W
13W	1300lm	100 lm/W

FIXTURE TYPE:  
PROJECT NAME:  
LOCATION:  
DATE:

LED WALL CYLINDER DOWNLIGHT  
ONLY WATTAGE SELECTABLE AND 5CCT

## Optional Accessories

---



Internal 4W Emergency Battery Backup  
SKU: WCS-EMBK-4W

- Internal battery backup is pre-install by request
- 90 minutes emergency operation
- Provide up to 400 lumen during emergency mode



Internal Photocell  
SKU: WCSPC-NK301

- Internal photocell is pre-install by request
  - Dusk to dawn photocell control
-