

# UFL2L Series

LED FLOOD LIGHT WATTAGE SELECTABLE & 3CCT

<b>Fixture Type:</b>
<b>Project Name</b>
<b>Location:</b>
<b>Date:</b>

## Features

- Premium durable High-Quality LED Flood Light, engineered to provide unparalleled performance and reliability.
- Built with high-grade aluminum for enhanced durability and protection against external elements.
- Efficient heat dissipation ensures optimal performance and longevity of the LED modules.
- Design to deliver a uniform and wide flood 7H X 6V light distribution.
- Featuring wattage selectable and 3CCT color temperature adjustable, allow you to customize the wattage and CCT on-site to suit your specific lighting needs.
- Versatile mounting options included: York mount , knuckles mount and Slipfitter mount.
- Premium powder coat dark bronze finish provides resistance to corrosion and weathering.
- Optional photocell feature offers automatic dusk to dawn operation, enhancing energy efficiency and convenience.
- The light engines and housing are IP65 rated, and sealed against moisture or environmental contaminants.



100W



## Specification

<b>Material</b>	Seal die casting aluminum housing	<b>Efficacy</b>	Up to 130 lm/W
<b>Lens</b>	Polycarbonate optical lens	<b>LED Life Span</b>	50,000 hrs
<b>Beam angle</b>	7H*6V	<b>Dimmable</b>	0-10V Dimming
<b>Color Temp</b>	3CCT 3000K/4000K/5000K	<b>Lumen Package</b>	7,500 lm to 13,000 lm
<b>CRI</b>	80	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120-277V	<b>Ambient Operation Temperature</b>	-40°C (-40°F) ~45°C (113°F)
<b>Installation</b>	Knuckle Yoke Slipfitter	<b>Listing</b>	UL Listed IP 65


# UFL2L Series

LED FLOOD LIGHT WATTAGE SELECTABLE & 3CCT

<b>Fixture Type:</b>
<b>Project Name</b>
<b>Location:</b>
<b>Date:</b>

## Ordering Guide

Example: UFL2L UW3CCT 100W KN

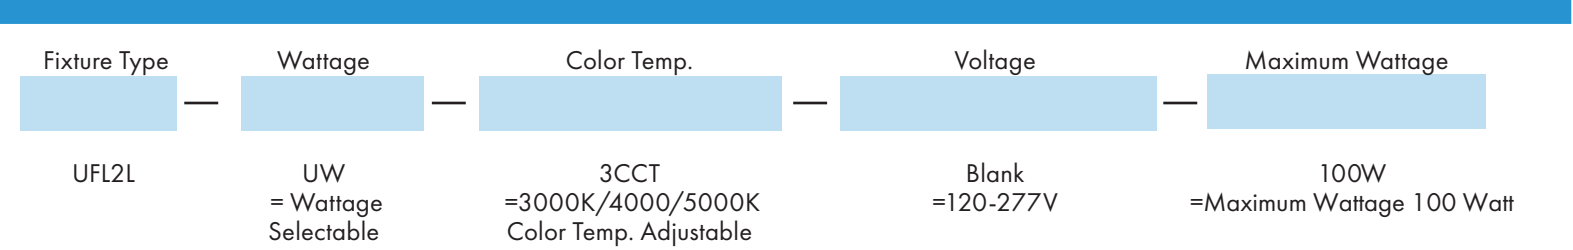

## Mounting Options

- Mounting
- KN  
= Knuckle Mount
  - YK  
=Yoke Mount
  - SP  
=Slipfitter

# UFL2L Series

LED FLOOD LIGHT WATTAGE SELECTABLE & 3CCT

**Fixture Type:**


**Project Name**

**Location:**

**Date:**

## Product Information

UFL2L-100W	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
100W	12,500 lm	125 lm/W	13,000 lm	130 lm/W	13,000 lm	130 lm/W
80W	10,000 lm	125 lm/W	10,400 lm	130 lm/W	10,400 lm	130 lm/W
60W	7,500 lm	125 lm/W	7,800 lm	130 lm/W	7,800 lm	130 lm/W

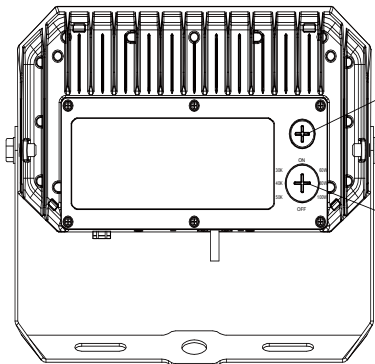

Photocell included

Open the plug with a flat-blade screwdriver and turn the switch to the desired position:

- The switch on the left indicates the gear of the color temperature;
- The switch in the middle indicates the opening or closing of the photo control sensor;
- The switch on the right indicates the gear of the power.

# UFL2L Series

LED FLOOD LIGHT WATTAGE SELECTABLE & 3CCT

Fixture Type:


Project Name

Location:


Date:

## Dimension


100W

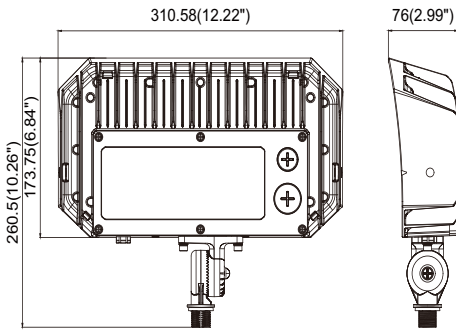

Knuckle

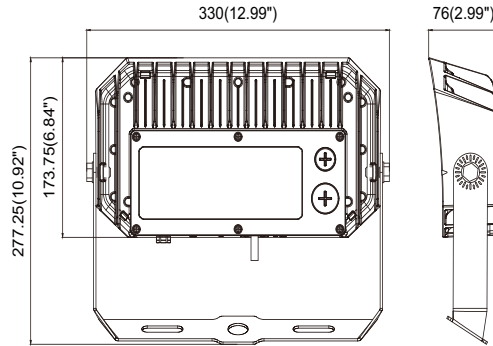

Yoke

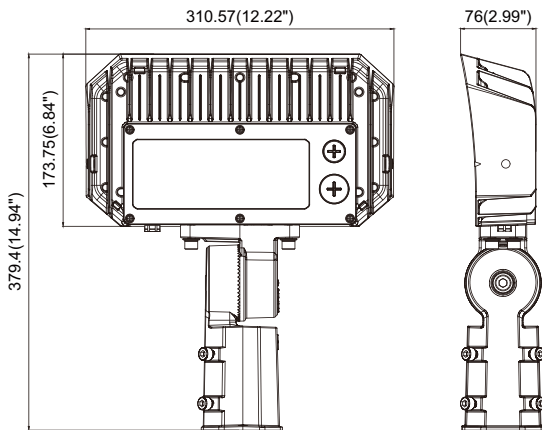

Slip-fitter