

FCWP3 Series



FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

SLIM FULL CUTOFF WALL PACK



Wattage switchable 65W/48W/32W/16W

Dimensions

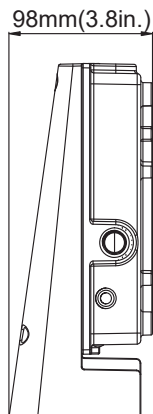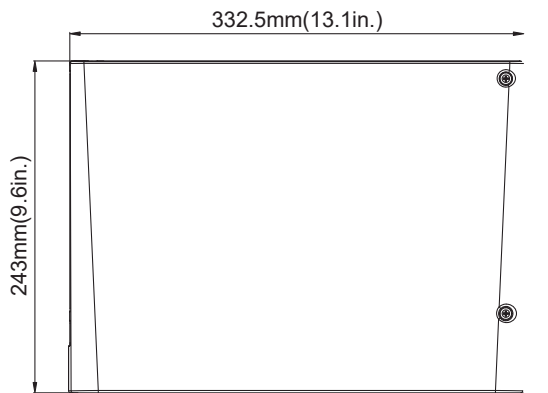

Specification

Size	13.1"x9.6"x3.8"
Weight	5 lb
IP Rate	IP65
Color Temp	3CCT 3000K/4000K/5000K
CRI	80
Input Voltage	120-277V
Power Factor	90%
LED Lifespan	50,000 Hrs
Dimmable	1-10V Dimmable
Efficacy	Up to 150 lm/W
Warranty	10 Years
Ambient Operation Temperature	Standard: -40°C(-40°F)-40°C (104°F) With EM: 5°C(41°F)-40°C (104°F) With low temperature EM: -20°C(-4°F)-40°C (104°F)

FCWP3 Series

FIXTURE TYPE:
 PROJECT NAME:
 LOCATION:
 DATE:

Features

- Sleek, low profile LED full cutoff wall pack
- Rugged die-cast aluminum housing
- Dark bronze powder coat finish with polycarbonate lens
- Wattage selectable from 16W to 65W with efficacy of up to 158 lm/W CCT adjustable 3000K/4000K/5000K
- Full cutoff with zero up light and low glare at angles
- Uniform distribution with no visible pixilation
- Easy installation for new construction or retrofit application
- Universal input voltage 120-277V
- Vandal-resistant lens

Ordering Guide Example: FCWP3-UW3CCT-65W

SKU	Wattage	Color Temp	Wattage Options	¹ Finish	Optional Accessories
FCWP3	UW = Wattage selectable	3CCT = Color Temp Adjustable (30K/40K/50K)	65W = Maximum Wattage 65W	Standard Finish Blank = Dark Bronze ¹ Premium Finish BK = Black WH = White	Blank = No accessories PC = Photocell (-WPPC) EMBK8W-CNP02 = 8W Emergency battery backup, internal pre-install. EMBKW2-H8W =Low temperature 8W emergency battery backup -4°F - 140°F

Note: 1.Premium finish incur an additional cost. Contact factory for MOQ and availability.

Product Information

	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
16W	2300lm	143 lm/W	2400lm	150 lm/W	2500lm	156 lm/W
32W	4700lm	146 lm/W	4800lm	150 lm/W	4900lm	153 lm/W
48W	7400lm	154 lm/W	7500lm	156 lm/W	7600lm	158 lm/W
65W	9500lm	146 lm/W	9700lm	151 lm/W	9800lm	151 lm/W

FCWP3 Series

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

Accessories



Internal Button Photocell

- SKU: WPPC
- Internal Photocell is pre-installed by request



Internal 8W Emergency Battery Backup SKU: EMBK8W-CNP02

- Internal battery backup is pre-install by request
- 90 minutes emergency operation
- Provide up to 1100 lumen during emergency mode



Internal 8W **Low Temperature** Emergency Battery Backup SKU: **EMBKW2-H8W**

- Suitable for low temperature location -4°F - 140°F
- Internal battery backup is pre-install by request
- 90 minutes emergency operation
- Provide up to 1100 lumen during emergency mode

BUG

CCT	B	U	G
3000K	3	0	2
CCT	B	U	G
4000K	3	0	3
CCT	B	U	G
5000K	3	0	3