LiRON LiGHTING

FCWP3 Series
Slim Full Cutoff Wall Pack

Features

- Sleek, low profile LED full cutoff wall pack
- Rugged die-cast aluminum housing
- Dark bronze powder coat finish with polycarbonate lens
- Wattage selectable from 16W to 65W with efficacy of up to 158 lm/W
- CCT adjustable 3000K/4000K/5000K
- Full cutoff with zero up light and low glare at angles
- Uniform distribution with no visible pixilation
- Easy installation for new construction or retrofit application
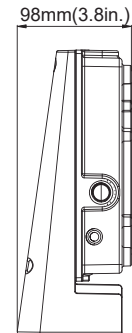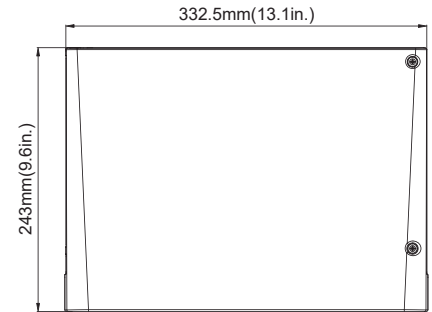- Universal input voltage 120-277V

Wattage switchable
65W/48W/32W/16W

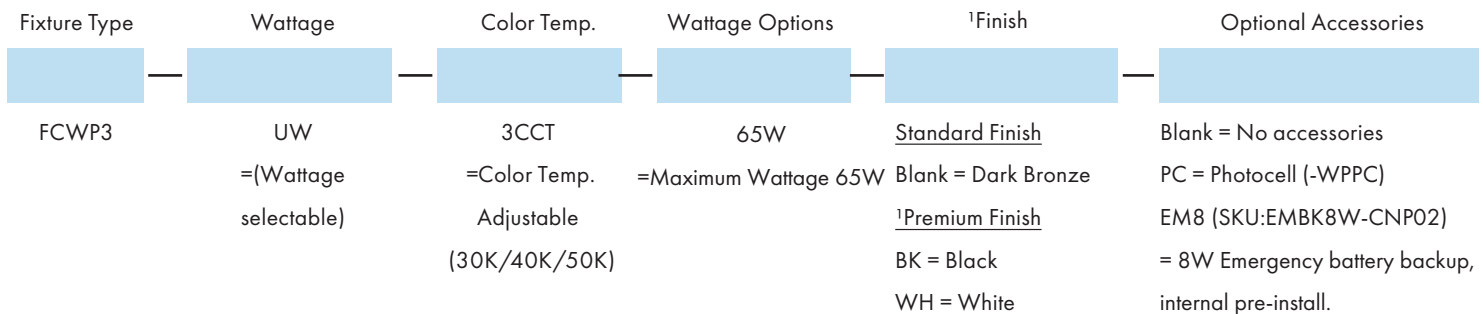Switch for wattage & 3CCT selectable

Dimensions

332.5mm(13.1in.)

243mm(9.6in.)

98mm(3.8in.)

Product Performance Standard

Size	13.1"x9.6"x3.8"	**Power Factor**	90%
Weight	5lb	**Life Span**	50,000 Hrs
IP Rate	IP65	**Dimmable**	1-10V Dimmable
Color Temp	3CCT 30/40/50K	**Efficacy**	Up to 150 lm/W
CRI	80	**Warranty**	10 Years
Input Voltage	120-277V	**Ambient Operation Temperature**	-40C° (-40°F) ~ 40° (104°F)

Ordering Guide   Example: FCWP3-UW3CCT-65W

Fixture Type	Wattage	Color Temp.	Wattage Options	¹Finish	Optional Accessories
FCWP3	UW =(Wattage selectable)	3CCT =Color Temp. Adjustable (30K/40K/50K)	65W =Maximum Wattage 65W	Standard Finish Blank = Dark Bronze ¹Premium Finish BK = Black WH = White	Blank = No accessories PC = Photocell (-WPPC) EM8 (SKU:EMBK8W-CNP02) = 8W Emergency battery backup, internal pre-install.

Note: 1.Premium finish incur an additional cost. Contact factory for MOQ and availability.

FCWP3 Series
Slim full cutoff Wall Pack

Product Information

	3000K		4000K		5000K	
WATTAGE	**LUMEN**	**EFFICACY**	**LUMEN**	**EFFICACY**	**LUMEN**	**EFFICACY**
65W	9500lm	146lm/W	9700lm	151lm/W	9800lm	151lm/W
48W	7400lm	154lm/W	7500lm	156lm/W	7600lm	158lm/W
32W	4700lm	146lm/W	4800lm	150lm/W	4900lm	153lm/W
16W	2300lm	143lm/W	2400lm	150lm/W	2500lm	156lm/W

Optional Accessories

Internal Button Photocell

- SKU: WPPC
- Internal Photocell is pre-installed by request

Internal 8W Emergency Battery Backup
SKU: EMBK8W-CNP02

- Internal battery backup is pre-install by request

- 90 minutes emergency operation
- Provide up to 1100 lumen during emergency mode

For the accessories detail, please visit www. lironlighting.com/product_categories/add-on-accessories

FCWP3- Rev 06-18-2024