LIRON LIGHTING
YOUR RELIABLE LIGHTING SOURCE

TWP2 Series

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:


LED TRADITIONAL WALL PACK SERIES 2


10 YEAR | CCT Selectable | Wattage Selectable | UL | TAA COMPLIANT | EMERGENCY BACKUP | IP65 | DLC





Dimensions

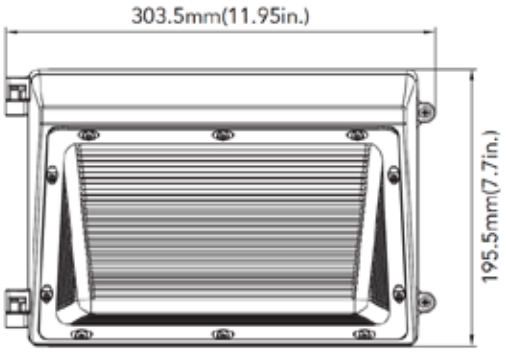

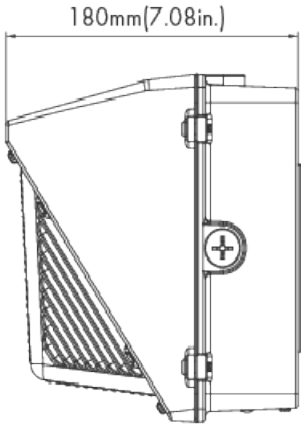

Specification

Size	11.95in L x 7.70in W x 7.08in H
Weight	5 lb
IP Rate	IP65
Color Temp	3CCT 3000K/4000K/5000K
CRI	70
Input Voltage	120-277V
Power Factor	90%
LED Lifespan	50,000 Hrs
Dimmable	1-10V Dimmable
Efficacy	Up to 136 lm/W
Warranty	10 Years
Ambient Operation Temperature	-40°C (-40°F)~40°C (104°F) With low temperature EM: -20°C (-4°F) - 40°C (104°F)

2025 Liron Lighting All Rights Reserved

LIRON LIGHTING
YOUR RELIABLE LIGHTING SOURCE

TWP2 Series

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

Features

- Rugged die cast aluminum housing and seals to housing gasket with stainless steel screws
- Dark bronze powder coat finish
- Polycarbonate optical lens with UV stabilizer
- Field wattage selectable 25W/40W/52W/62W
- Field 3CCT color temperature adjustable 30K/40K/50K
- 1/2 inch threaded hole for easier wire connections
- J box or surface mounting
- Optional accessories internal photocell/emergency battery/motion sensor are available

Ordering Guide Example: TWP2-UW3CCT-62W

SKU	Wattage	Color Temp	Wattage Options	[1]Finish	[2]Optional Accessories
TWP2	UW = Wattage selectable	3CCT = Adjustable Color Temperature (30K/40K/50K)	62W = Maximum Wattage 62W	Standard Color Finish Blank = Dark Bronze Premium Color Finish BK = Black WH = White	Blank = No accessories PC = Photocell (-WPPC) EMBKW2-H8W = Low temperature 8W emergency battery backup -4° F - 140°F MS = Motion Sensor (-BL-PIR823-IN)

Note: 1. Standard color finish is dark bronze. Premium color incur on additional cost, contact factory for MOQ and availability.

Product Information

	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
25W	3200lm	128 lm/W	3300lm	132 lm/W	3400lm	136 lm/W
40W	5100lm	127 lm/W	5200lm	130 lm/W	5300lm	132 lm/W
52W	6500lm	125 lm/W	6600lm	126 lm/W	6800lm	131 lm/W
62W	7700lm	124 lm/W	7800lm	125 lm/W	8100lm	124 lm/W

2025 Liron Lighting All Rights Reserved

LIRON LIGHTING
YOUR RELIABLE LIGHTING SOURCE

TWP2 Series

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

Accessories



Internal Button Photocell

- SKU: WPPC
- Internal Photocell is pre-installed by request



Internal 8W Low Temperature Emergency Battery Backup SKU: EMBKW2-H8W

- Suitable for low temperature location -4°F - 140°F
- Internal battery backup is pre-install by request
- 90 minutes emergency operation
- Provide up up to 1100 lumen during emergency mode



Internal PIR - Motion Sensor

- SKU: BL-823PIR-INT
- Motion Sensor is pre-installed by request
- Provide multi-level control based on motion or daylight contribution

---

For the accessories detail, please visit www. lironlighting.com/product_categories/add-on-accessories

www.lironlighting.com sales@lironlighting.com 833-875-4766
2025 Liron Lighting All Rights Reserved