

RCNP3 Series

LED Round Canopy Wattage Selectable and 2CCT


Fixture Type:
Project Name
Location:
Date:

Features

- LED round canopy provides a high level of brightness, up to 7,500 lumen only consuming 60Watts, ensures energy efficiency while still providing sufficient brightness.
- With 4 power package selectable (60W/46W/34W/22W) and 2CCT adjustable (4000K/5000K) , providing options for varying levels of brightness to suit specific lighting requirements.
- Built with a sturdy aluminum housing, ensuring durability and resistance to harsh weather conditions, impacts and corrosion.
- Effective heat dissipation mechanisms are integrated into the design to prevent overheating and ensure the longevity and reliability of the LEDs.
- A corrosion-resistant powder coating with white finish further enhances its durability.
- Come with a quick mounting plate, simplifying the installation process for surface mount application. Optional 3/4" conduit pendent mount.
- 1/2" knockout holes are provided on three sides of the fixture, allowing for easy wiring installation through surface conduit.
- Optional emergency battery and motion sensor features enhance both security and energy efficiency.



Dimensions

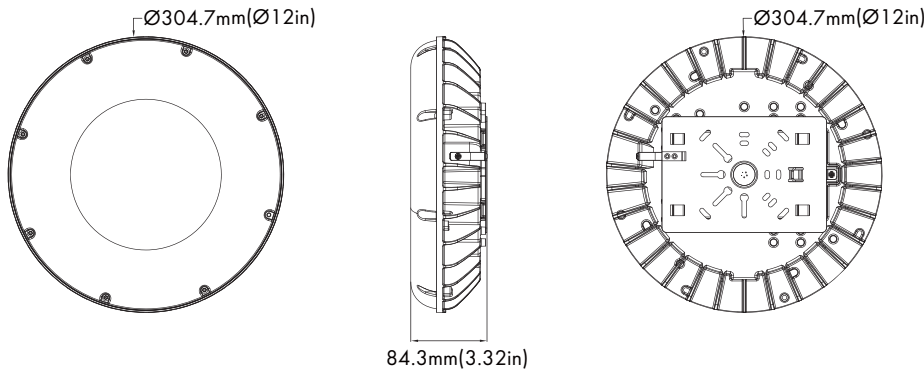

Weight:
60W: 5.73lbs

Specification

Material	One piece die cast aluminum housing	Efficacy	Up to 125 lm/W
Lens	Anti UV prismatic translucent lens	LED Life Span	50,000 hrs
Beam angle	100 degree	Dimmable	0-10V Dimming
Color Temp	2CCT 4000K/5000K	Lumen Package	3,500 lm to 7,500lm
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40°C (-40°F) ~45°C (113°F)
Installation	Surface Mount 3/4" Conduit Pendant Mount	Listing	UL Listed Wet location listed




RCNP3 Series


LED Round Canopy Wattage Selectable and 2CCT

Fixture Type:
Project Name
Location:
Date:

Ordering Guide Example: RCNP3-UW2CCT-60W

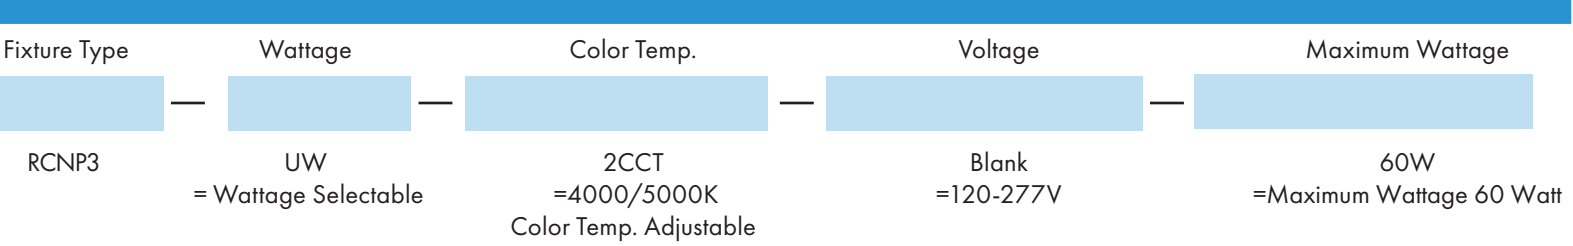

Optional Accessories

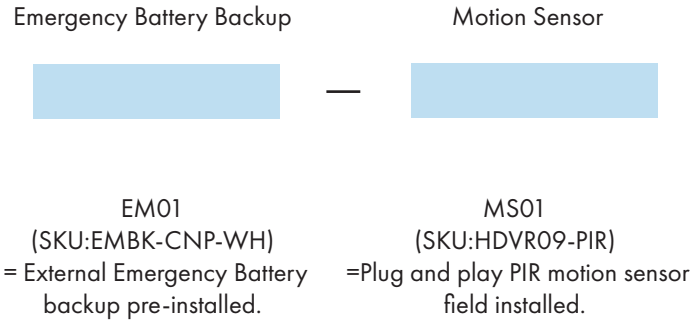

RCNP3 Series

LED Round Canopy Wattage Selectable and 2CCT

Fixture Type:

Project Name

Location:

Date:

Product Information

RCNP3-60W		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	
60W	7,700 lm	128 lm/W	7,500 lm	125 lm/W	
46W	6,500 lm	141 lm/W	6,300 lm	137 lm/W	
34W	5,000 lm	147 lm/W	4,900 lm	134 lm/W	
22W	3,600 lm	164 lm/W	3,500 lm	159 lm/W	

Optional Accessories

Emergency Battery Backup:



Emergency Battery Backup Box

SKU: EMBK-CNP-WH

- External battery backup is pre-installed by request.
- 90 minutes emergency operation.
- Provide up to 800 lumen during emergency mode.

Motion Sensor:



PIR Plug and Play Manually Adjustable Motion Sensor 12V 3.5mm audio plug

SKU:HD09VR-PIR

- 3.5mm audio plug passive infrared motion sensor.
- With daylight harvesting and photocell function.
- The rotating switch is built into the motion sensor and allows you to manually adjust the standby dimming level and hold time without needing a remote control.

RCNP3 Series


LED Round Canopy Wattage Selectable and 2CCT

Fixture Type:

Project Name

Location:

Date:

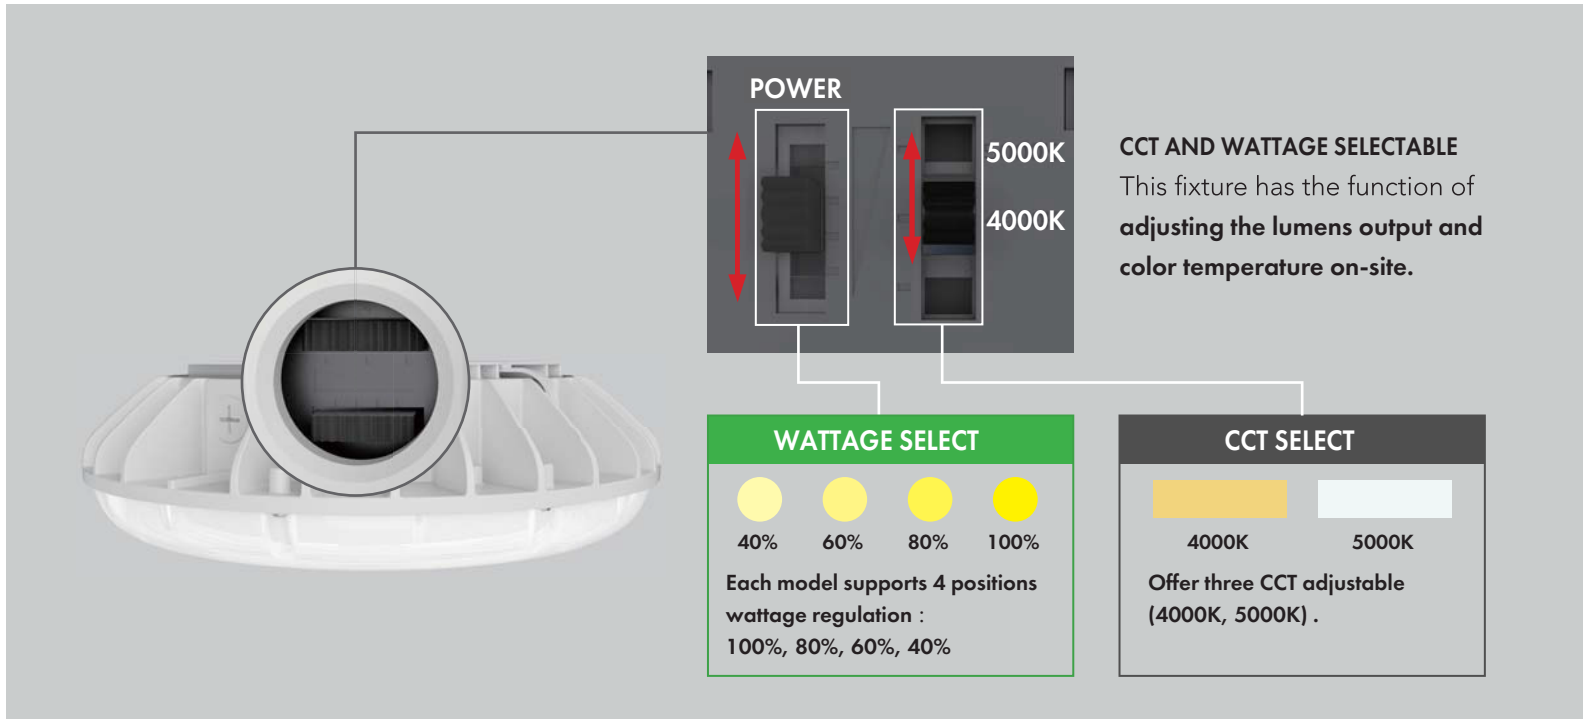

1/2 inch threaded hole

Support wires coming from the hole for easier wire connections.

Emergency Battery

900lm, 90min

Photometry

Parking Garage Photometry

Plug and Play PIR Sensor

Optional PIR sensor allows for security and energy saving.

Mounting Bracket

Suitable for J-BOX mounting, and easy for installation, also support pendant mounting, wires coming out from the back for easier wire connections.

Housing

One piece die cast housing better waterproofing, suitable for both indoor and outdoor application.

