

T8 4FT TUBES Series

Wattage selectable & 5CCT T8 TUBES

Fixture Type:

Project Name

Location:

Date:

Features


- Compatible with most instant and programmed start electronic T8 ballasts with G13 base.
- Bypass ballast runs on 120-277V line voltage.
- Single- or double-ended wiring.
- 5CCT adjustable 3500K/4000K/5000K/5700K/6000K
- Wattage selectable 24W/18W/15W/12W/10W
- 50,000+ hour lifetime.
- Suitable for dry and damp indoor locations.
- Operating temperature -4°F to +113°F.
- ETL Listed.



Product Performance Standard

Dimension	4FT	Power Factor	95%
Weight	0.51 lb	Life Span	50,000 Hrs
TYPE	T8 LED TUBE	Beam angle	100 Degree
Color Temp.	3500K-4000K-5000K-5700K-6000K	Material	Plastic/Aluminum
Input Voltage	120-277V	Ambient Operation Temperature	-20°C (-4°F) ~55°C (131°F)

Ordering Guide Example: AT8-4FT-F

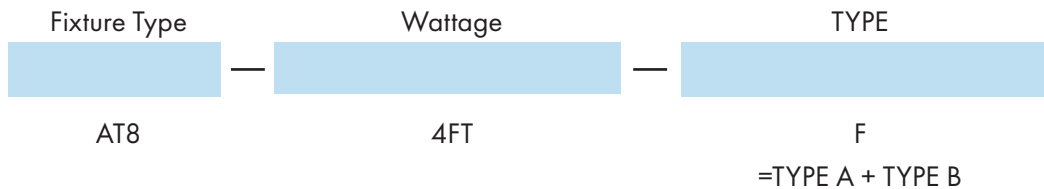

T8 TUBES Series

Wattage selectable & 5CCT T8 TUBES

Fixture Type:

Project Name

Location:



Date:

Product Information

4FT		5000K	
WATTAGE	LUMEN	EFFICACY	
24W	3050lm	127lm/W	
18W	2430lm	135lm/W	
15W	2100lm	140lm/W	
12W	1750lm	146lm/W	
10W	1500lm	150lm/W	

Dimension

Unit: mm/inch

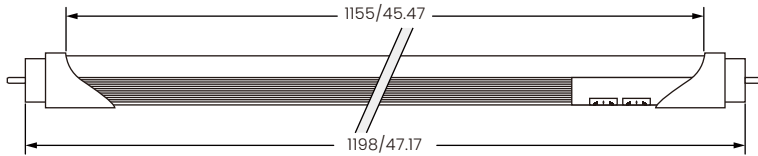

Dimensional tolerances: (+1.5mm, -1.0mm)