

# T8 8FT TUBES Series

Wattage selectable & 5CCT T8 TUBES

<b>Fixture Type:</b>
<b>Project Name</b>
<b>Location:</b>
<b>Date:</b>

## Features


- Compatible with most instant and programmed start electronic T8 ballasts with FA8 base.
- Bypass ballast runs on 120-277V line voltage.
- Single- or double-ended wiring.
- 5CCT adjustable 3500K/4000K/5000K/5700K/6000K
- Wattage selectable 48W/42W/36W/30W/W24W
- 50,000+ hour lifetime.
- Suitable for dry and damp indoor locations.
- Operating temperature -4°F to +113°F.
- ETL Listed.



## Product Performance Standard

<b>Dimension</b>	8FT	<b>Power Factor</b>	95%
<b>Weight</b>	0.51 lb	<b>Life Span</b>	50,000 Hrs
<b>TYPE</b>	T8 LED TUBE	<b>Beam angle</b>	160 Degree
<b>Color Temp.</b>	3500K-4000K-5000K-5700K-6000K	<b>Material</b>	Plastic/Aluminum
<b>Input Voltage</b>	120-277V	<b>Ambient Operation Temperature</b>	-20°C (-4°F) ~55°C (131°F)

## Ordering Guide Example: AT8-8FT-F

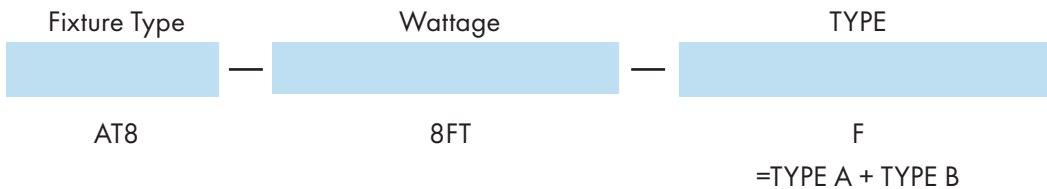

# T8 TUBES Series

Wattage selectable & 5CCT T8 TUBES

**Fixture Type:**

**Project Name**


**Location:**

**Date:**

## Product Information

8FT		5000K	
WATTAGE	LUMEN		EFFICACY
48W	6050lm		127lm/W
42W	5550lm		135lm/W
36W	5000lm		140lm/W
30W	4380lm		146lm/W
24W	3600lm		150lm/W

## Dimension

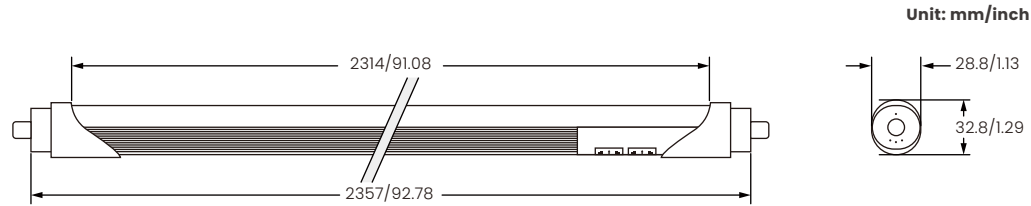

Dimensional tolerances: (+1.5mm, -1.0mm)