

BLR4 Bollard Light

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:


BLR4-UW3CCT-24W



Specification

Size	42.49inx5.5in/41.97inx5.5in /42.02inx5.5in
IP	IP65
Color Temp	3000K / 4000K / 5000K (Selectable)
Input Voltage	120-277VAC
CRI	80
Dimmable	0-10V Dimming (10%-100%)
Efficacy	Up to 150lm/W
PF	>90%
Life Span	50,000hrs
Warranty	5 Years
Ambient Operation Temperature	Standard:-40°C to 45°C (-40°F to 113°F) With Emergency Battery:5°C to 45°C (41°F to 113°F)
Listing	UL Listed, Wet Location

Dimensions

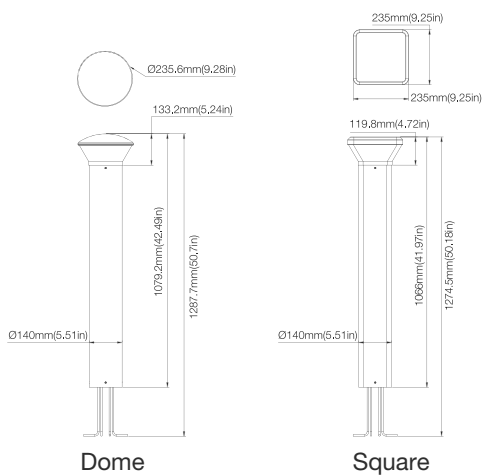

BLR4 Bollard Light

FIXTURE TYPE:	
PROJECT NAME:	
LOCATION:	
DATE:	

BLR4-UW3CCT-24W

Features

- **Sleek, Durable Design:** Constructed with a rugged die-cast aluminum housing, the BLR4 combines strength with a modern aesthetic—perfect for low-mounted outdoor lighting applications such as building entrances, walkways, pedestrian plazas, and sidewalks.
- **Versatile Form Factors:** Available in both square and round profiles to suit diverse design requirements.
- **Interchangeable Optical Modules:** The modular design allows for easy replacement of the light engine system, ensuring adaptability across different applications.
- **Selectable Wattage and CCT:** Offers field-adjustable wattage and color temperature (3000K, 4000K, 5000K) to provide flexible, energy-efficient lighting solutions.
- **High-Performance Lens Options:** Features milky polycarbonate lenses for long-lasting optical performance and glare control.
- **Built-In Emergency Battery:** Ensures uninterrupted operation during power outages.
- **360° Illumination:** Provides uniform light distribution in all directions for enhanced visibility and safety.

Ordering Guide Example: BLR4S-UW3CCT-24W

Fixture Type	Structure Category	Wattage	Color Temp	Voltage	Wattage Options
BLR4	S =Square H =Dome top	UW = Wattage Selectable (10W,14W,19W,24W)	3CCT = 3000/4000/5000K Color Temp. Adjustable	Blank = 120-277V	24W = Max Wattage 24W
Finish	Diffuser	Optional Accessories			
Blank = Dark Bronze	Blank =frosted diffuser	Blank = No accessories			
BK = Black		EM = Emergency battery backup			
WH =White					
SG =Silver Grey					

BLR4 Bollard Light


FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

BLR4-UW3CCT-24W

Performance Data

BLR4-UW3CCT-24W

			3000K		4000K		5000K	
WATTAGE	SWITCH SETTING	CRI	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
24W	100%	80	3000lm	125lm/W	3200lm	133lm/W	3100lm	129lm/W
19W	80%	80	2500lm	132lm/W	2600lm	137lm/W	2550lm	134lm/W
14W	60%	80	1900lm	136lm/W	2000lm	143lm/W	1950lm	139lm/W
10W	40%	80	1400lm	140lm/W	1500lm	150lm/W	1450lm	145lm/W

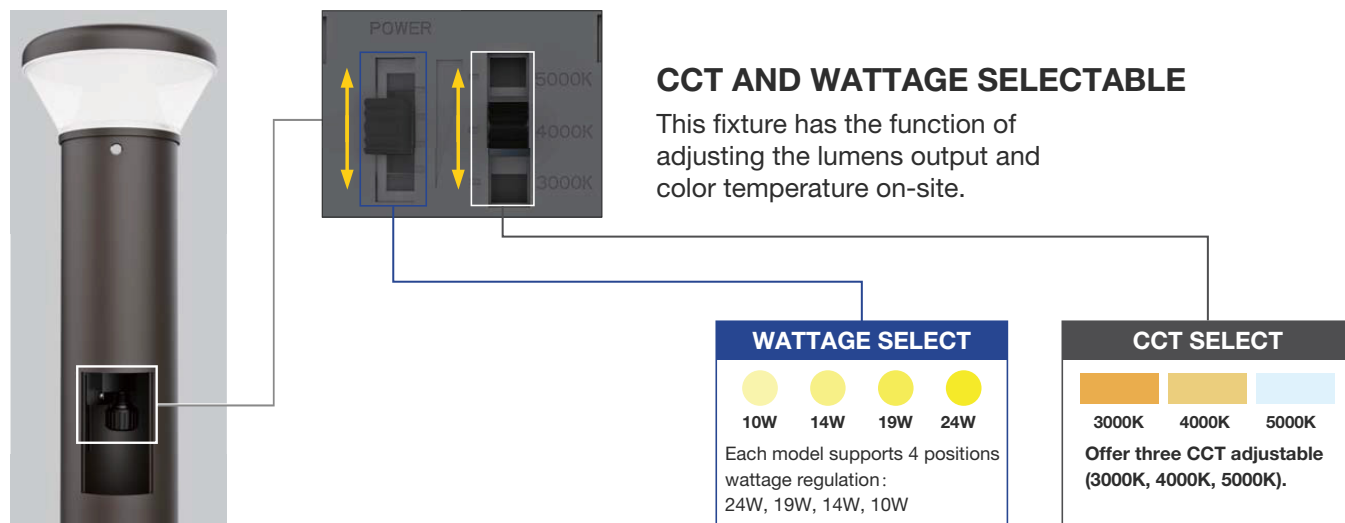

BLR4 Bollard Light

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

BLR4-UW3CCT-24W

Optional Accessories



Emergency Battery Backup (Optional)