LIRON LIGHTING

APHX SERIES

One Fixture. Optional Mounts. Endless Possibilities.

A field-selectable area light platform for arm, wall, ceiling, gooseneck, and pendant applications.



Content

Explore Your Bracket Options.

#	Section	PAGE
01	**Mounting Options**	PAGE 3
02	**Ready To Scale**	PAGE 4
03	**Brackets**	PAGE 5
	▪ Direct Mount	5
	▪ Wall Mount	6
	▪ Ceiling Mount	7
	▪ Gooseneck Mount	8
	▪ Pendant Mount	9
04	**Configure It For The Site**	PAGE 10

MOUNTING OPTIONS

One Fixture, Five Mounts. Every Application.

APHX brings one visual language and one configurable LED platform across a broad range of site and building applications.



				
Arm Mount Bracket APHX-AM	Wall Mount Bracket APHX-WM	Ceiling Mount APHX-CM	Gooseneck Mount APHX-GM	Pendant Mount APHX-PM



ARM MOUNT BRACKET

A clean connection for complete site coverage.

The Direct Mount Bracket creates a compact pole-mounted installation for a streamlined site-lighting appearance. It supports the same APHX platform, including selectable wattage, 3CCT selection, and adjustable optical distribution—helping standardize lighting across a project.



ROUND
Pole Mount



SQUARE
Pole Mount

RECOMMENDED APPLICATIONS

Pedestrian routes, parks, campuses, parking perimeters, and commercial site lighting.



WALL MOUNT BRACKET

Extend the light. Elevate the facade.

The Wall Mount Bracket projects the APHX fixture away from the mounting surface, delivering targeted illumination while maintaining a clean architectural profile. Pair it with APHX's field-adjustable Type III, Type IV, or Type V distribution to tailor light coverage to the application.

RECOMMENDED APPLICATIONS

Building perimeters, exterior entrances, pedestrian walkways, loading areas, covered entries, and facade lighting.

WALL MOUNT BRACKET
SKU: APHX-WM





CEILING MOUNT

Purpose-built overhead light, without visual clutter.

The Ceiling Mount keeps the APHX fixture close to the mounting surface for a neat, overhead installation. It is an efficient solution for locations that need broad, functional illumination from canopies, soffits, and covered structures.

RECOMMENDED APPLICATIONS

Canopies, covered walkways, parking structures, breezeways, porte-cochères, exterior soffits, and covered entrances.

CEILING MOUNT
SKU: APHX-CM





GOOSENECK MOUNT

A distinctive profile for pedestrian scale spaces.

The Gooseneck Mount adds a decorative, architectural silhouette while positioning the fixture outward from the mounting surface. It brings APHX performance—including selectable CCT, wattage, and light distribution to spaces where visual character matters as much as illumination.

RECOMMENDED APPLICATIONS

Hospitality entrances, retail storefronts, courtyards, building facades, pedestrian paths, and outdoor gathering spaces.

GOOSENECK MOUNT
SKU: APHX-GM



Note: 2-3/8" pole adapter; mounting pipe not included.



PENDANT MOUNT

Suspend performance with architectural style.

The Pendant Mount creates a refined suspended installation for canopies and overhead structures. It brings the fixture closer to the active space below while preserving the APHX platform's high-efficacy, adjustable performance.

RECOMMENDED APPLICATIONS

Covered entries, hotel drop-offs, outdoor dining areas, arcades, lobbies, canopies, and open-air gathering spaces.

PENDANT MOUNT
SKU: APHX-PM



Note: 3/4" threaded hole for pendant mounting; pendant pipe not included.

READY TO SCALE.

Fewer SKUS More Flexibility.

The APHX platform combines configurable output, adaptable distribution, controls readiness, and a broad mounting family in one architectural form.

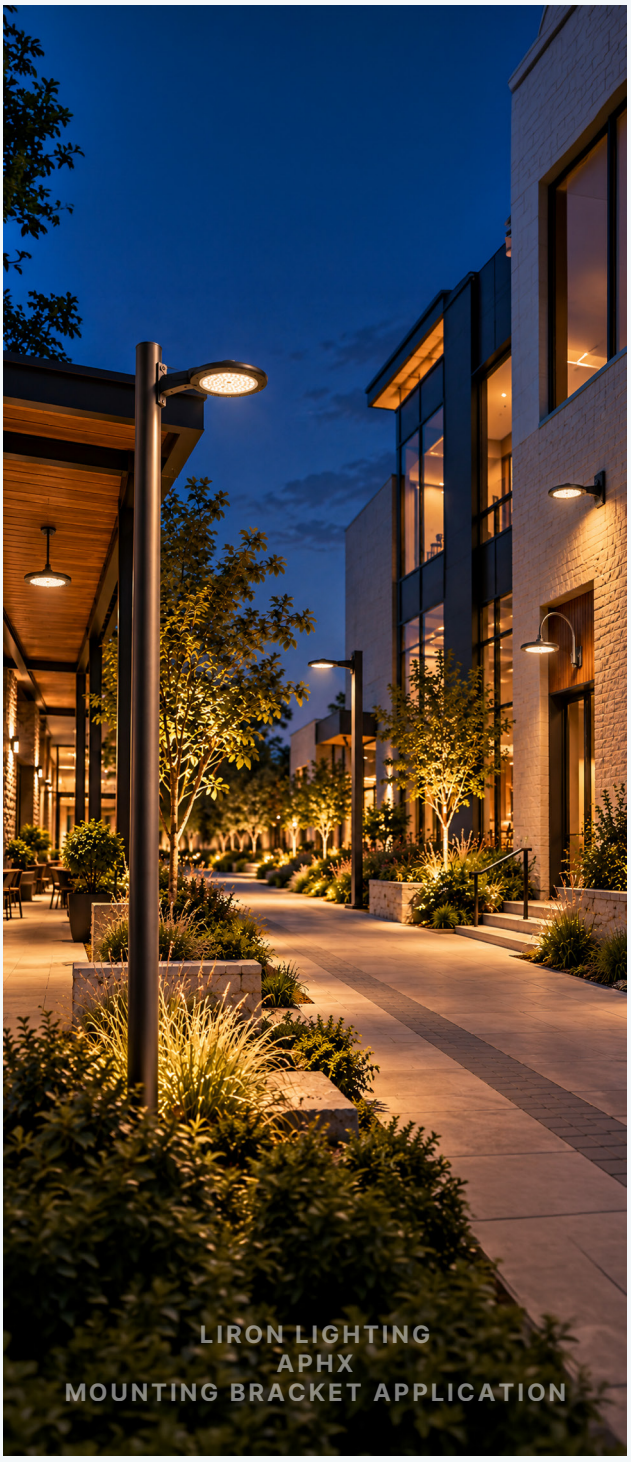

LIRON LIGHTING
APHX
MOUNTING BRACKET APPLICATION

5 YEAR · IP65 · UL CERTIFIED · 3CCT Selectable · Wattage Selectable · DLC LISTED PREMIUM

01 **SELECTABLE DISTRIBUTION**
Type III, IV, or V optics in one fixture

02 **3CCT ADJUSTABLE**
3 CCT choices:
3000K, 4000K and 5000k

03 **CONTROLS READY**
Dusk-to-dawn photocell plus PIR and Bluetooth sensor options

04 **WATTAGE SELECTABLE**
Match output to the applications with four wattage levels

05 **BUILT FOR THE ENVIRONMENT**
Aluminum housing, IP65, UL Listed, DLC Premium

COMMERCIAL ADVANTAGES

A flexible specification platform that supports a streamlined SKU strategy, domestic inventory planning, and fast project fulfillment.

CONFIGURE IT FOR THE SITE

One APHX Platform Multiple Tailored Results.

Adjust the APHX platform to configure the fixture to suit the site, without changing the platform.

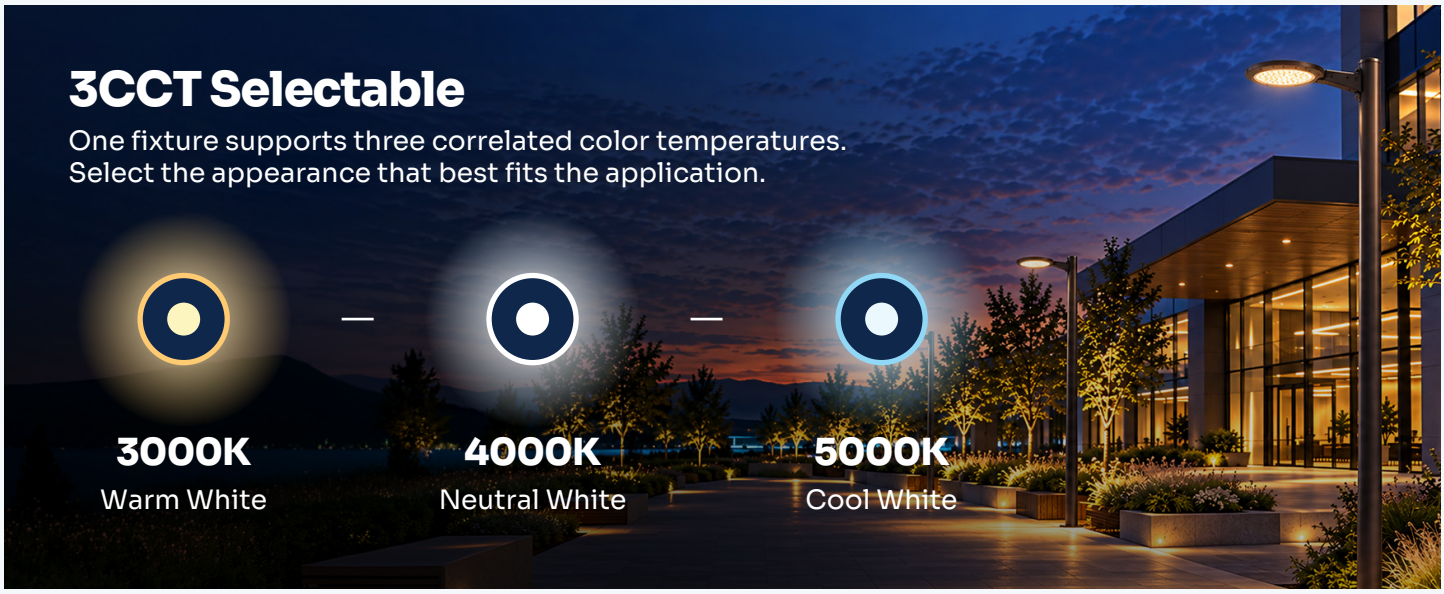



Dusk To Dawn Photocell

Automated on and off operation

PIR Motion Sensor

Plug in sensor with manual field settings

Bluetooth Sensor

Silvair compatible plug-in sensing

CONFIGURE IT FOR THE SITE

One APHX Platform Multiple Tailored Results.

PEAK LIGHT OUTPUT

7,200 lm
TO
22,275 lm

High output performance for demanding exterior applications.

SYSTEM EFFICACY

180lm/W
MAXIMUM LM/W

Get more usable light from every watt.

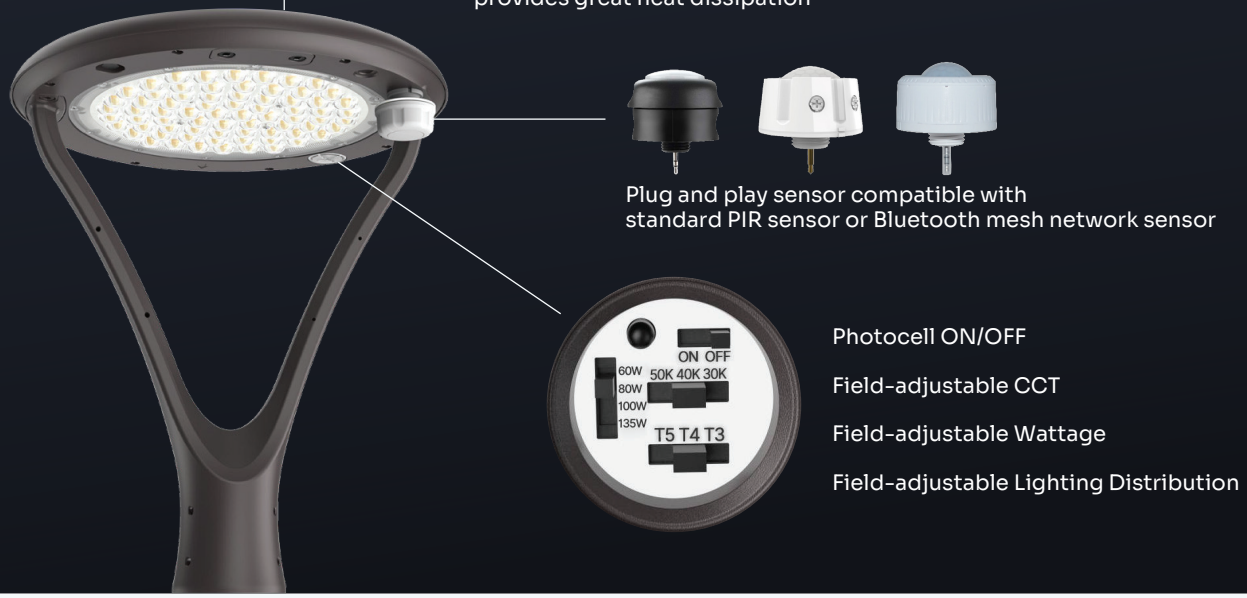

Distribution

Adjust the optical distribution to match the site layout



Type III | Type IV | Type V

LIRON LIGHTING

APHX SERIES

ONE PLATFORM MORE WAYS TO LIGHT THE SITE.

APHX combines high output, field-adjustable performance, and five mounting options in one flexible outdoor lighting platform.

From walkways and building perimeters to covered entries and pedestrian spaces, APHX helps you deliver a consistent visual language across the project without compromising on performance or installation flexibility.



READY TO CONFIGURE YOUR APHX SOLUTION?

VISIT OUR WEBSITE
LIRONLIGHTING.COM

EXPERT SUPPORT
833-875-4766