

WARNING


PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

1. Consult a qualified electrician to ensure correct branch circuit conductor.
2. The product should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
3. Risk of electric shock. Ensure that main power source is off when wiring or soldering the sections of the product.
4. Before installing this fixture or doing any maintenance, make sure to turn off the power supply at the circuit breaker or fuse box.
5. Check to make sure that all fixture connections have been properly made and the fixture is grounded to avoid potential electrical shocks.
6. Designed for use in AC 120-347V, 50/60Hz, 0-10V dimming, protected circuit.

SHOCK HAZARD!



Turn power OFF at circuit breaker prior to installation or servicing.

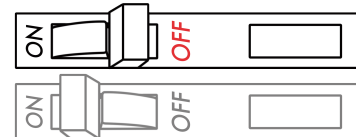


TOOLS REQUIRED

Tools:

1. Sharp Side Cutter
2. Electric Drill
3. Level
4. Measuring Tool
5. Wire Stripper / Knife
6. Philips Screwdrivers
7. Wire Cutters


WIRING

CORD/ SUPPLY WIRING



Installation Guide

1. Route the electrical lead through the mounting hole before mount the fixture onto Stick.
2. Adjust the aiming angle of the fixture by loosening the pivot screw, then tighten pivot screw.
3. Make wire connection (see wiring diagram below).
4. Plug the stick into the ground, installation done.

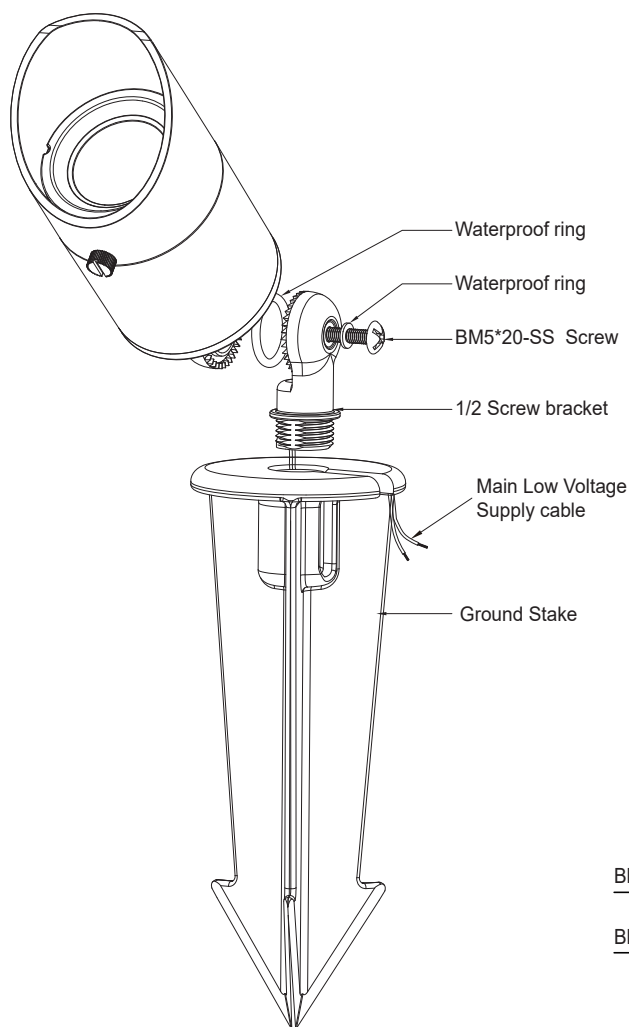

Wire Connection

