

# 2DD Series 2nd Gen Disk Downlight



## Features

- 6"/8" Aluminum Disk down light
- Single color temperature or CCT adjustable (3000K/4000K/5000K)
- Triac dimming
- Easy installation fit 3"/4"/5"/6" J-box or 5"/6" Can
- Optional battery backup
- Architecture white finish standard



LED2DD-BU

## Dimension

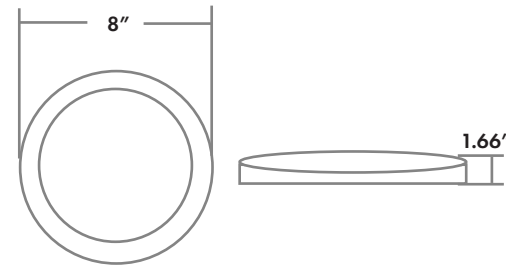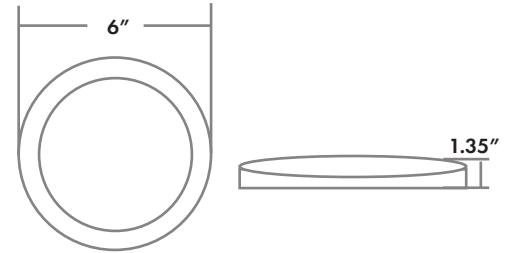

## Product Performance Standard

<b>Size</b>	6"/8"	<b>Power Factor</b>	≥90%
<b>Weight</b>	1 lb	<b>LED Lifespan</b>	50,000 Hrs
<b>CRI</b>	80	<b>Dimmable</b>	Triac Dimming
<b>Color Temp</b>	Single Color/CCT Adjustable	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120V	<b>Ambient Operation Temperature</b>	0C° (32°F) ~40C°(104°F)

## Ordering Guide

Example: LED2DD20W8IN3CT -BU

Fixture Type	Wattage & Size	Color Temp.	Finish	Test Button	<sup>2</sup> Emergency Battery
LED2DD	15W6IN 20W8IN	<sup>1</sup> 40K = 4000K 3CT = CCT Adjustable 3000K/4000K/5000K	Blank = White	Blank BU = Test Button	Blank EMJB12W = Jbox Emergency Battery

Note: 1.4000K option is only available for 15W6IN.  
2.Emergency battery backup only available for 3CCT fixture.

## 2DD Series 2nd Gen Disk Downlight

### Performance Data

		3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	
15W	950lm	63lm/W	980lm	65lm/W	1000lm	67lm/W	
20W	1450lm	73lm/W	1480lm	74lm/W	1500lm	75lm/W	

### Optional Accessories



#### EM Test Button

SKU:-BU

-Pre installed test button for emergency battery backup



#### JBox Emergency Battery Backup

SKU:-EMJB12W

- External Jbox Emergency battery backup
- Delivery up to 900 lumen for 90 min emergency use
- Only available for CCT adjustable fixture

For the accessories detail, please visit [www.lironlighting.com/product\\_categories/add-on-accessories/](http://www.lironlighting.com/product_categories/add-on-accessories/)


# 2DD Series 2nd Gen Disk Downlight

<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

## Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

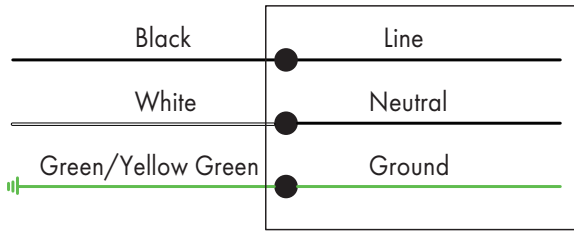

Scan the QR code or visit [www.lironlighting.com/products/led2dd](http://www.lironlighting.com/products/led2dd) for the complete luminaire installation guide.

Note:

---



---



---



---



---



---



---