



VT4 Series

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

LED VAPOR TIGHT WATTAGE SELECTABLE & 3CCT

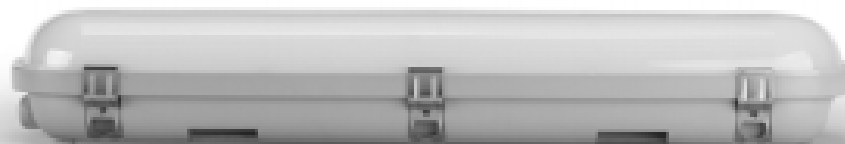

Dimensions

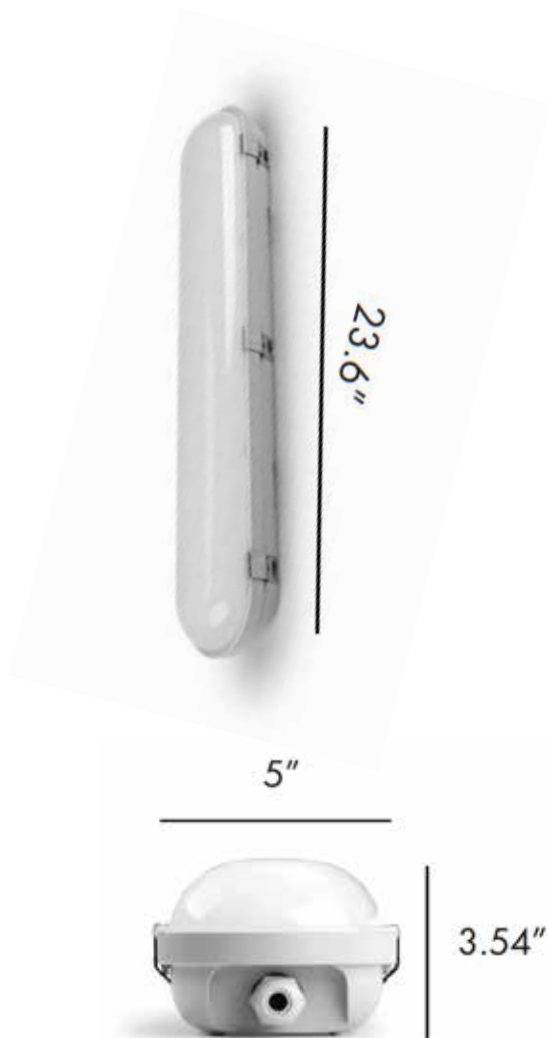

Specification

Size	23.6" x 5" x 3.54"
Weight	4 lb
IP Rate	IP65
CRI	70
Color Temp	3CCT
Input Voltage	120-277V
Power Factor	90%
Life Span	50,000 Hrs
Dimmable	0-10V Dimmable
Efficacy	Up to 130 lm/W
Warranty	5 Years
Ambient Operation Temperature	-20°C (-4°F) ~ 40°C(104°F)
Wattage	Wattage selectable 25W/20W/15W

VT4 Series

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

LED VAPOR TIGHT WATTAGE SELECTABLE & 3CCT

Features

- 2FT wattage selectable and 3CCT vapor tight.
- High impact resistant acrylic prismatic lenses attached with stainless steel clips, enhancing the airtight seal.
- Wattage selectable 15W/20W/25W
- Color temperature adjustable 3000K/4000K/5000K
- 0-10V dimmable
- 3/4" knockouts hole for easier installation
- Weather proof fixture - IP65 Rated suitable for wet location
- Optional accessories internal motion sensor and internal emergency battery backup

Ordering Guide Example: VT4-2FT-UW-3CCT-25W

Fixture Type	Length	Wattage	3CCT	Voltage	Wattage Options	Optional Accessories
VT4	2FT = 2 ft	UW = Wattage Selectable	3CCT = Color Temperature Selectable	Blank = 120-277V	25W =Maximum Wattage	Blank = No accessories MS = Motion Sensor (BL-810MW-IN) EM = Emergency Battery Backup (EMBK8WL-S-INT01)

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

LED VAPOR TIGHT WATTAGE SELECTABLE & 3CCT

Product Information

2'	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
25W	3175lm	127lm/W	3225lm	129lm/W	3250lm	130lm/W
20W	2540lm	127lm/W	2580lm	129lm/W	2600lm	130lm/W
15W	1905lm	127lm/W	1935lm	129lm/W	1950lm	130lm/W

BUG Rating


WATTAGE	B	U	G
50W	1	3	2
40W	1	3	2
30W	1	3	2

Optional Accessories



Internal Motion Sensor
SKU:BL-810MW-IN

- Internal motion sensor is field installed or pre-installed by request



Internal Emergency Battery Backup
SKU:EMBK8W-CNP02

- External battery backup is pre-installed by request
- Delivery 1040 lumen for 90 minutes emergency operation