

## VT4 Series

LED Vapor Tight Wattage Selectable & 3CCT

**Fixture Type:**

**Project Name**

**Location:**


**Date:**

### Features

- High impact resistant acrylic prismatic lenses attached with stainless steel clips, enhancing the airtight seal
- Wattage selectable 30W/40W/50W
- Color temperature adjustable 3000K/4000K/5000K
- 0-10V dimmable
- 3/4" knockouts hole for easier installation
- Weather proof fixture - IP65 Rated suitable for wet location
- Optional accessories internal motion sensor and emergency battery backup
- 5 Year warranty



### Dimensions

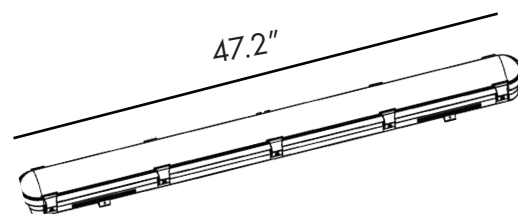

### Product Performance Standard

<b>Size</b>	47.2" x 5" x 3.54"	<b>Power Factor</b>	90%
<b>Weight</b>	8 lb	<b>Life Span</b>	50,000 Hrs
<b>IP Rate</b>	IP65	<b>Dimmable</b>	0-10V Dimmable
<b>Color Temp</b>	3CCT	<b>Efficacy</b>	Up to 160 lm/W
<b>CRI</b>	70	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120-277V	<b>Ambient Operation Temperature</b>	-37C° (-30°F) ~ 50C° (122°F)



### Ordering Guide

Example: VT4-4FTUW3CCT-50W

Fixture Type	Length	Wattage	3CCT	Voltage	Wattage Options	Optional Accessories
VT4	4FT = 4 Feet	UW = Wattage Selectable	3CCT = Color Temperature Selectable	Blank = 120-277V HV =480V	50W =Maximum Wattge 50W	Blank = No accessories MS = Motion Sensor (BL-810MW-IN) EM = Emergency Battery Backup (EMBK8WL-S-INT01) 6FT Aircraft Cable

Last updated: 1-23-2023

## VT4 Series

LED Vapor Tight Wattage Selectable & 3CCT

**Fixture Type:**

**Project Name**

**Location:**

**Date:**

### Product Information

4'		3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	
50W	7900lm	158lm/W	8000lm	160lm/W	8000lm	160lm/W	
40W	6320lm	158lm/W	6400lm	160lm/W	6400lm	160lm/W	
30W	4740lm	158lm/W	4800lm	160lm/W	4800lm	160lm/W	

### BUG Rating

WATTAGE	B	U	G
50W	1	3	2
40W	1	3	2
30W	1	3	2

### Optional Accessories



#### Internal Motion Sensor

- Internal motion sensor is field installed or pre-installed by request



#### Internal Emergency Battery Backup

- External battery backup is pre-installed by request
- Delivery 1280 lumen for 90 minutes emergency operation



#### 6FT aircraft cable

- SKU: AircraftCable-VT4/SP2-6FT

## VT4 Series

LED Vapor Tight Wattage Selectable & 3CCT


Fixture Type:

Project Name


Location:

Date:


## Wiring Diagram

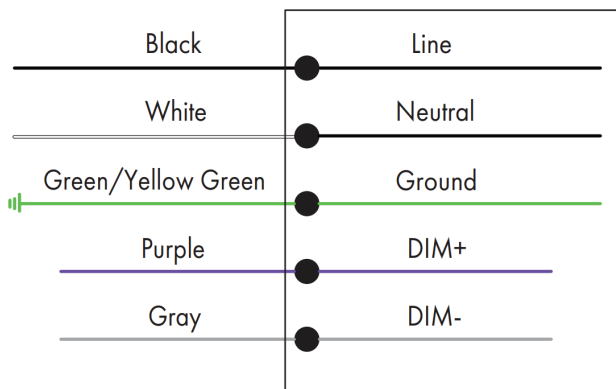


## Installation Instructions




1. Drill four holes into the screw locations on the ceiling.

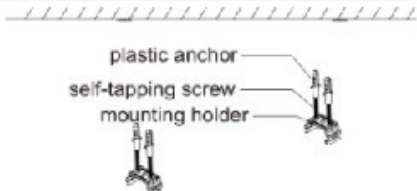

2. Fix the plastic anchor into the ceiling, insert the screws into the metal clamp, then fix the screws into the anchor




3. Fix the fixture into the clamps shown as above



4. Complete the installation as the above picture shown

### Wiring

L (Live Line)  
 GND (Ground)  
 N (Null Line)



**Warning: Turn off the power before installation**