

# BLR Series Landscape Bollard

**Fixture Type:**

**Project Name:**

**Location:**


**Date:**

## Features

- Durable die cast square housing
- Dark bronze polyester powder coat finish
- UV stabilized polycarbonate lens with annular
- 360 degrees surround illumination
- 1-10V dimming driver
- Robust ground cage pre-buried installation
- Compatible with emergency battery backup



## Dimension

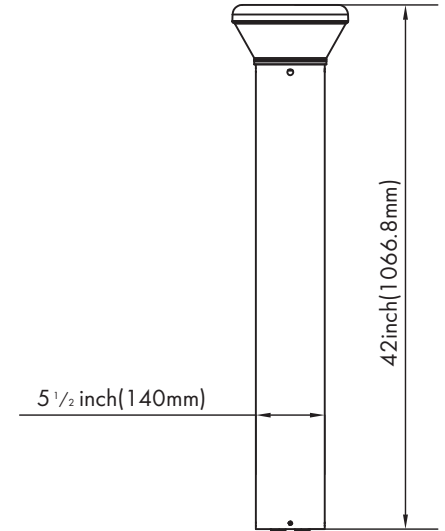

## Product Performance Standard

|                      |                 |                                      |                                |
|----------------------|-----------------|--------------------------------------|--------------------------------|
| <b>Size</b>          | 42L" X 5 1/2" W | <b>Power Factor</b>                  | ≥90%                           |
| <b>Weight</b>        | 12 lb           | <b>LED Lifespan</b>                  | 50,000 Hrs                     |
| <b>IP Rate</b>       | IP65            | <b>Dimmable</b>                      | 1 - 10V Dimming                |
| <b>Color Temp</b>    | 4000K-5000K     | <b>THD</b>                           | ≤20%                           |
| <b>CRI</b>           | 80              | <b>Warranty</b>                      | 5 Years                        |
| <b>Input Voltage</b> | 120-277V        | <b>Ambient Operation Temperature</b> | -45C° (-50°F)<br>~40C° (104°F) |

## Ordering Guide Example: LEDBLR 26W40K

| Fixture type | Wattage | Color Temp.            | Voltage          | Finish  | Options  |
|--------------|---------|------------------------|------------------|---|--|
| LEDBLR       | 26W     | 40K=4000K<br>50K=5000K | Blank = 120-277V | Blank = Dark Bronze<br>BK = Black<br>WH = White | Blank = No Accessories<br>EM=Emergency Battery Backup (S-EMBK8WLV-INT) |

Notes: 1. Other finish color, consult factory for availability.



## Fixture Type:

Project Name:

Location:

Date:

## Product Information

| 4000K   |        |          | 5000K  |          |
|---------|--------|----------|--------|----------|
| WATTAGE | LUMEN  | EFFICACY | LUMEN  | EFFICACY |
| 26W     | 3000lm | 115lm/W  | 3100lm | 119lm/W  |

## Optional Accessories



### Emergency Battery Backup

- SKU: S-EMBK8WLV-INT
- Internal battery backup is field installed or pre-installed by request.
- 1000 lumen for 90min emergency use.

For the accessories detail, please visit [www.lironlighting.com/product\\_categories/add-on-accessories](http://www.lironlighting.com/product_categories/add-on-accessories)

## Fixture Type:

Project Name:


Location:

Date:

## Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

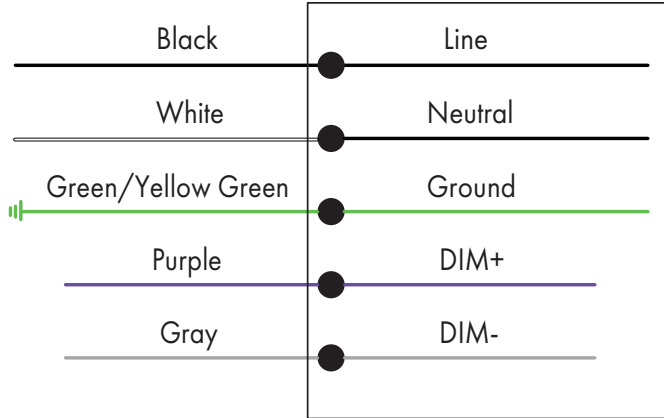

Scan the QR code or visit [www.lironlighting.com/products/ledblr](http://www.lironlighting.com/products/ledblr) guide for the complete luminaire installation guide.

Note:

---

---

---

---

---

---

---

---