

3MHB Series UFO High Bay

Fixture Type:

Project Name:

Location:



Date:

Features

- Rugged die cast aluminum housing with dark bronze polyester powder coat finish.
- Sealed design with silicone strip for use in wet location.
- Impact resistant polycarbonate lens.
- 1-10V dimming driver.
- 90 degrees beam angle.
- 5 ft power cord ,extension power cord available.
- Hook mount/pendant mount with 3/4" conduit size.
- Optional accessories motion sensor and emergency battery backup are available.



Dimension

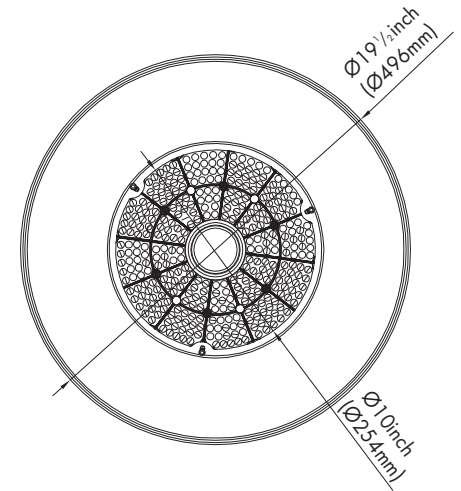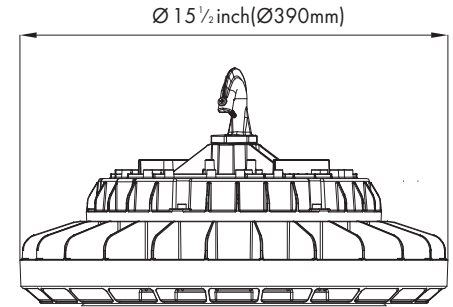

Product Performance Standard

Size	15 1/2" L Ø19 1/2"	Power Factor	°90%
Weight	15 lb	LED lifespan	50,000 Hrs
Color Temp	4000K - 5000K	Dimmable	1-10V Dimming
CRI	80	Warranty	5 Years
Input Voltage	120-277V/347-480V	Ambient Operation Temperature	-40C° (-40°F) ~55C° (131°F)

Ordering Guide Example: LED3MHB 135W 50K

Fixture Type	Wattage	Color Temp.	Voltage	Finish	² Optional Accessories	Reflector
LED3MHB	100 W	40K=4000K	Blank = 120-277V	Blank =Dark Bronze	Blank = No Accessories	Blank = No Reflector
	135W	50K=5000K	¹ HV = 347-480V		MS = Motion Sensor (BL-PIR823-IN)	3MHB-ALU = Al uminum Reflector
	175W				EM = Emergency Battery Backup (EMBK-3MHB)	3MHB-ACRC = Acrylic Reflector
	200W					3MHB-ACRCLENS = Drop Len
						3MHB-ACRCCLAMPER=Clamper

Notes: 1. 347-480V is not available for 100W.
2. Motion sensor and emergency battery is not available for 347-480V.

Fixture Type:

Project Name:

Location:

Date:

Product Information

WATTAGE	4000K		5000K	
	LUMEN	EFFICACY	LUMEN	EFFICACY
100W	13800lm	138lm/W	14000lm	140lm/W
135W	19170lm	142lm/W	19400lm	144lm/W
175W	25725lm	147lm/W	26075lm	149lm/W
200W	29600lm	148lm/W	29800lm	150lm/W

Optional Accessories



PIR Motion Sensor

-SKU: BL-PIR823-IN

-Internal photocell is field installed or pre-installed by request.



Microwave Motion Sensor

-SKU: BL-810BD-MCW

-Internal photocell is field installed or pre-installed by request.



Emergency Battery Backup

-SKU: EMBK-3MHB

-External 16W battery backup is field installed.

-Delivery up to 2,400 lumen for 90min emergency use

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories

Fixture Type:

Project Name:

Location:

Date:

Optional Reflector



Aluminum Reflector

- SKU: 3MHB-ALU
- Standard 16" diameter lens, 90 degree beam angle.



Smooth Flat Lens Reflector

- SKU: 3MHB-ACRC
- Standard clear acrylic, high beam angles.



Conical Bottom Drop Lens

- SKU: 3MHB-ACRCLENS
- 16" conical drop lens designed to mount directly on acrylic reflector.



Clamper

- SKU: 3MHB-ACRCLAMPER
- Clamper for acrylic lens and drop Lens