

BLR2 Series

Wattage & 3CCT Selectable Bollard

Fixture Type:

Project Name:

Location:

Date:


Features

- Durable die cast aluminum housing
- Dark bronze polyester powder coat finish
- Annular diffuser provide glow soft light around
- Wattage selectable from 10W to 26W with efficacy of up to 119 lm/W
- 3CCT adjustable 3000K/4000K/5000K
- 360 degrees surround illumination with 80 CRI
- Optional emergency battery available



Switch for wattage & 3CCT selectable

Dimensions

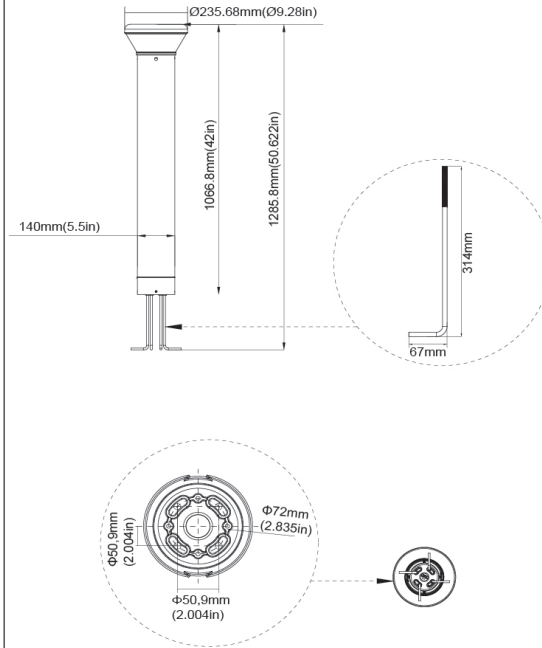


Product Performance Standard

Size	42in x 5.5in	Power Factor	90%
Weight	12lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT 30/40/50K	Efficacy	Up to 122 lm/W
CRI	80	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (113°F)

Ordering Guide

Example: BLR2-UW3CCT

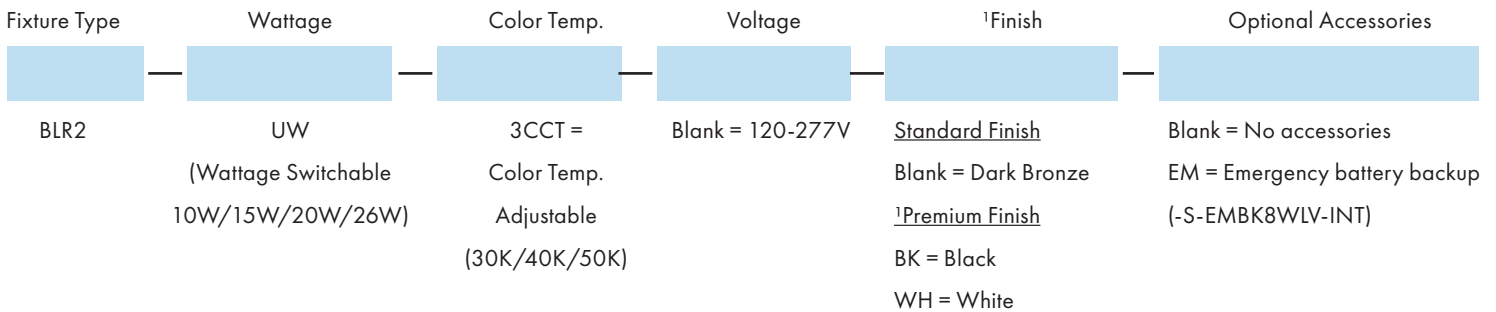

Note: 1.Premium finish incur an additional cost. Contact factory for MOQ and availability.

BLR2 Series

Wattage & 3CCT Selectable Bollard

Fixture Type:

Project Name:

Location:

Date:

Product Information

WATTAGE	3000K		4000K		5000K	
	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
26W	2800lm	110lm/W	3000lm	115lm/W	3100lm	119lm/W
20W	2200lm	110lm/W	2300lm	115lm/W	2380lm	119lm/W
15W	1650lm	110lm/W	1725lm	115lm/W	1785lm	119lm/W
10W	1100lm	110lm/W	1150lm	115lm/W	1190lm	119lm/W

Optional Accessories



Internal Emergency battery backup

- SKU: S-EMBK8WLV-INT
- Internal emergency battery backup is pre-installed by request
- Provide up to 1000 lumen in emergency situations

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories