

3MHB Series UFO High Bay

Fixture Type:

Project Name:

Location:

Date:

Features



- Rugged die cast aluminum housing with dark bronze polyester powder coat finish
- Sealed design with silicone strip for use in wet location
- Resistant to shock and vibration
- 1-10V dimming driver
- 90 or 120 degrees lens for different light range and intensity level
- 5 ft power cord ,extension cord available
- Hook mount
- Compatible with motion sensor and emergency battery backup



Product Performance Standard

| | | | |
|----------------------|--------------------|--------------------------------------|--------------------------------|
| Size | 15 1/2" L Ø19 1/2" | Power Factor | ≥90% |
| Weight | 15 lb | LED lifespan | 50,000 Hrs |
| Color Temp | 4000K - 5000K | Dimmable | 1-10V Dimming |
| CRI | 80 | Warranty | 5 Years |
| Input Voltage | 120-277V/348-480V | Ambient Operation Temperature | -40C° (-40°F) ~55C° (131°F) |

Dimension

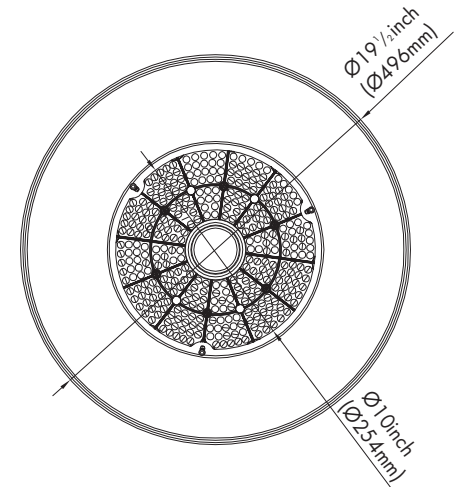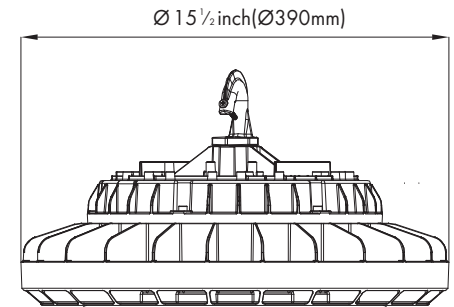

Ordering Guide

Example: LED3MHB 135W 50K

| Fixture Type | Wattage | Color Temp. | Voltage | Finish | Optional Accessories | Reflector |
|--------------|---------|-------------|------------------|---------------------|---|-------------------------------|
| LED3MHB | 100 W | 40K=4000K | Blank = 120-277V | Blank =Dark Bronzed | Blank = No Accessories | Blank = No Reflector |
| | 135W | 50K=5000K | HV = 347-480V | | MS = Motion Sensor (BL-PIR-INT) | 3MHB-ALU = Aluminum Reflector |
| | 175W | | | | EM = Emergency Battery Backup (EMBK-3MHB) | 3MHB-ACRC= Acrylic Reflector |
| | 200W | | | | | |

Fixture Type:

Project Name:

Location:

Date:

Product Information

| 4000K | | | 5000K | |
|---------|---------|----------|---------|----------|
| WATTAGE | LUMEN | EFFICACY | LUMEN | EFFICACY |
| 100W | 13800lm | 138lm/W | 14000lm | 140lm/W |
| 135W | 19170lm | 142lm/W | 19400lm | 144lm/W |
| 175W | 25725lm | 147lm/W | 26075lm | 149lm/W |
| 200W | 29600lm | 148lm/W | 29800lm | 150lm/W |

Optional Accessories



PIR Motion Sensor

-SKU: BL-PIR-INT

-Internal photocell is field installed or pre-installed by request.



Microwave Motion Sensor

-SKU: BL-810BD-MCW

-Internal photocell is field installed or pre-installed by request.



Emergency Battery Backup

-SKU: EMBK-3MHB

-External 8W battery backup is field installed.

-Delivery 1000 lumen for 90min emergency use

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories

Fixture Type:

Project Name:

Location:

Date:

Optional Reflector



Aluminum Reflector

-SKU: 3MHB-ALU

-Standard 16" diameter lens, 90 degree beam angle.



Smooth Flat Lens Reflector

-SKU: 3MHB-ACRC

-Standard clear acrylic, high beam angles.



Conical Bottom Drop Lens

-SKU: 3MHB-ACRCLENS


-16" conical drop lens designed to mount directly on acrylic reflector.

| |
|----------------------|
| Fixture Type: |
| Project Name: |
| Location: |
| Date: |

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

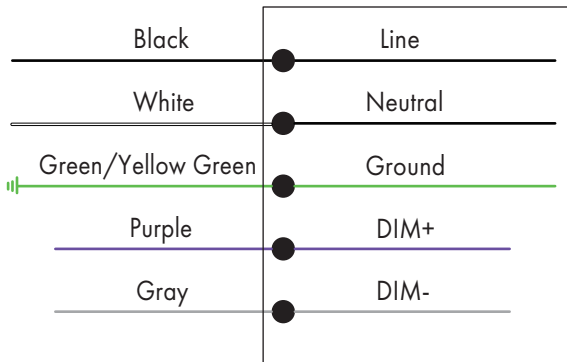

Scan the QR code or visit
www.lironlighting.com/products/led3mhb
 for the complete luminaire installation guide.

Note:
