

FCWP3 Series

Slim Full Cutoff Wall Pack

Fixture Type:

Project Name:

Location:

Date:

Features

- Sleek, low profile LED full cutoff wall pack
- Rugged die-cast aluminum housing
- Dark bronze powder coat finish with polycarbonate lens
- Wattage selectable from 16W to 65W with efficacy of up to 158 lm/W
- CCT adjustable 3000K/4000K/5000K
- Full cutoff with zero up light and low glare at angles
- Uniform distribution with no visible pixilation
- Easy installation for new construction or retrofit application
- Universal input voltage 120-277V





Wattage switchable
65W/48W/32W/16W



Switch for wattage & 3CCT
selectable

Dimensions

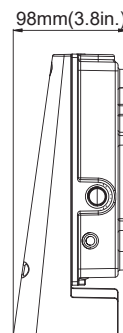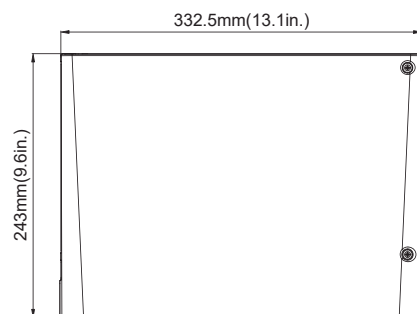

Product Performance Standard

Size	13.1"x9.6"x3.8"	Power Factor	90%
Weight	5lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT 30/40/50K	Efficacy	Up to 150 lm/W
CRI	80	Warranty	10 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (104°F)

Ordering Guide

Example: FCWP3-UW3CCT-65W

Fixture Type	Wattage	Color Temp.	Wattage Options	¹ Finish	Optional Accessories
FCWP3	UW =(Wattage selectable)	3CCT =Color Temp. Adjustable (30K/40K/50K)	65W =Maximum Wattage 65W	<u>Standard Finish</u> Blank = Dark Bronze <u>¹Premium Finish</u> BK = Black WH = White	Blank = No accessories PC = Photocell (-WPPC) EM = Emergency Battery Backup (EMBK8WH-A-INT01)

Note: 1.Premium finish incur an additional cost. Contact factory for MOQ and availability.

Updated: 12-5-2022



10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

FCWP3 Series

Slim full cutoff Wall Pack

Fixture Type:

Project Name:

Location:

Date:

Product Information

3000K			4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
65W	9500lm	146lm/W	9700lm	151lm/W	9800lm	151lm/W
48W	7400lm	154lm/W	7500lm	156lm/W	7600lm	158lm/W
32W	4700lm	146lm/W	4800lm	150lm/W	4900lm	153lm/W
16W	2300lm	143lm/W	2400lm	150lm/W	2500lm	156lm/W

Optional Accessories



Internal Button Photocell

- SKU: WPPC
- Internal Photocell is pre-installed by request



Internal Emergency Battery Backup


- SKU: EMBK8WH-A-INT01
- Internal battery backup is pre-installed by request
- Delivery 900 lumen for 90 minutes emergency operation

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories



Date:

Wiring Diagram

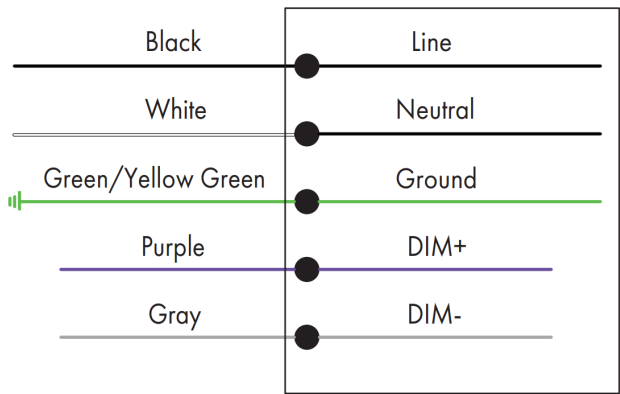

Scan the QR code or visit
www.lironlighting.com/product/sfcwp1s for
the complete luminaire installation guide.

NOTE:

