LIRON LIGHTING

Fixture Type:
Project Name:
Location:
Date:

STPL-V Series Vertical Step Light

Features:

- Built in 3W dimmable LED vertical step light
- Die cast aluminum housing
- Suitable for wet location use
- Black, silver gray or oil bronze finish
- 120V input power

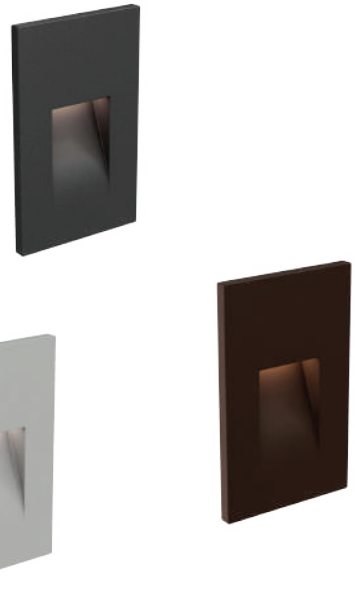

Product Performance

Dimension	$4\frac{3}{4}$"*$2\frac{7}{8}$"	**Power Factor**	≥90%
Weight	2 lb	**LED Lifespan**	50,000 Hrs
CRI	80	**Dimmable**	YES
Color Temp	3000K	**Warranty**	5 Years
Input Voltage	120V	**Ambient Operation Temperature**	0C° (32°F) ~40C°(104°F)

Dimensions

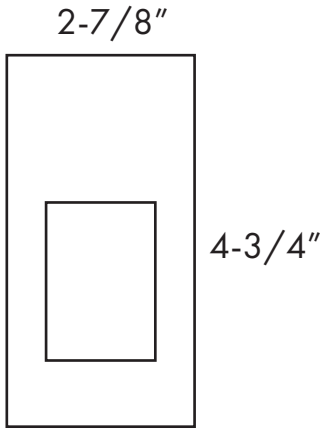

Ordering Guide

Example: STPL-V3W30KSG

Part Number	Wattage	Color Temp.	Finish
STPL-V	3W = 3 Watt	30K = 3000K	BK = Black OB = Oil bronze SG = Silver Gray

10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

LIRON LIGHTING

Fixture Type:
Project Name:
Location:
Date:

STPL-V Series Vertical Step Light

Performance Data:

3000K		
WATTAGE	LUMEN	EFFICACY
3W	120lm	40lm/W

Installation Guide

1.OUTLET BOX (NOT INCLUDED)
2.FIXTURE SCREW
3.MOUNTING BRACKET
4.BLACK FIXTURE WIRE
5.WHITE FIXTURE WIRE
6.FIXTURE GROUND WIRE
7.WIRE NUTS
8.FACE PLATE
9.POWER SUPPLY GROUND WIRE
10.BLACK SUPPLY WIRE
11.WHITE SUPPLY WIRE

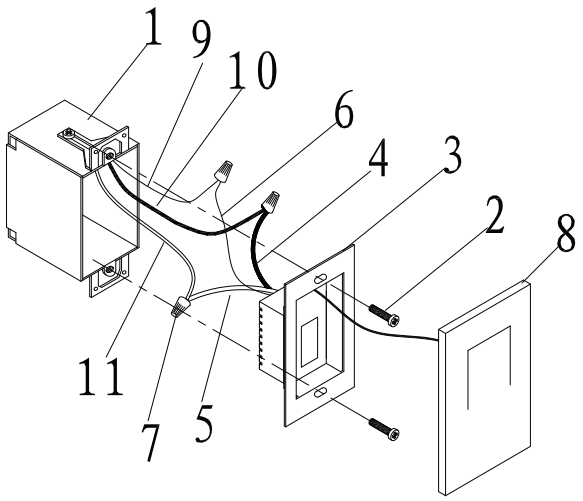

1.Pull the power supply wires out from the OUTLET BOX (1) and mount the MOUNTING BRACKET (3) to the OUTLET BOX (1), using MOUNTING SCREWS (2).

2.Attach the power supply wires to the fixture lead wires by connecting Black to black(10), White to white(11). Attach the POWER SUPPLY GROUND WIRE(9) from the OUTLET BOX and the fixture ground wire(6) by using wire nut (7)

3. After wires are connected, tuck them carefully inside the outlet box.

4.Place face plate (8) on the fixture.

10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.