

# WF 4/6 Series

5CCT Ultra Slim Recessed Downlight

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

## Features



- 0.39" Ultra thin canless recessed lights designed for the new construction
- Housing and J-box not required; easy install spring clips firmly secure recessed LED lights in ceiling
- Selectable 5CCT from 2700K to 5000K
- Durable die cast aluminum alloy for optimal heat dissipation
- Compatible with many dimmers that dimming from 100% to 10%
- White finish
- Wet location rated



## Product Performance Standard

<b>Size</b>	4"/6"	<b>Power Factor</b>	90%
<b>Weight</b>	2lb	<b>Life Span</b>	50,000 Hrs
<b>Mounting</b>	Recessed Mount	<b>Dimmable</b>	Traic dimmable
<b>Color Temp</b>	5CCT	<b>Efficacy</b>	up to 80 lm/W
<b>CRI</b>	90	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120V	<b>Ambient Operation Temperature</b>	-15C° (-4°F) ~ 40° (104°F)

## Dimensions

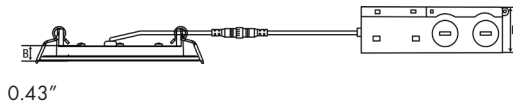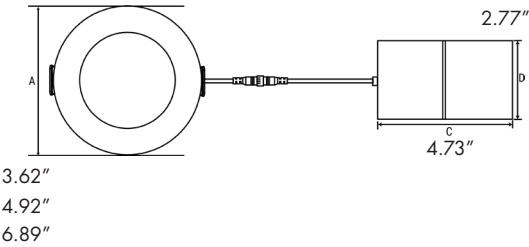

## Ordering Guide

Example: WF4-5CCT

Fixture Type	Size & Wattage	Color Temp.	Voltage	Trim
WF	4 = 4Inch 6 = 6Inch	5CCT = 27/30/35/40/50K (Color Temperature Adjustable)	Blank = 120V	Blank = White

# WF 4/6 Series

5CCT Ultra Slim Recessed Downlight

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

## Product Information

Size & Wattage	2700K		3000K		3500K		4000K		5000K	
	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
4Inch 9W	562lm	62lm/W	602lm	66lm/W	613lm	68lm/W	637lm	70lm/W	644lm	71lm/W
6Inch 12W	936lm	78lm/W	996lm	86lm/W	996lm	86lm/W	1038lm	86lm/W	1038lm	86lm/W

6 Inch: Easily flip the switch for desired CCT

