

LARGE ARCHITECTURAL FULL CUTOFF WALL PACK

Fixture Type:

Project Name

Location:

Date:

Features

-Innovative architectural full cutoff wall pack, designed with the lastest LED technology. -This cutting-edge luminaire offers long lasting, maintenance-free solution, delivering an impressive energy savings of up to 80% compared to metal halide.

-Featuring wattage selectable and 3CCT color temperature adjustable, allow you to customize the wattage and CCT on-site to suit your specific lighting needs.


-Premium powder coat dark bronze finish provides resistance to corrosion and weathering.


-PIR motion sensor and internal emergency battery backup available.


-Suitable for wet location



Dimensions







Net Weight: 100W: 9.41lb

Specification

Material	Seal die casting aluminum housing	Efficacy Up to 140 Im/W		
Lens	UV stabilized optical grade polymer refractor lenses	LED Life Span	50,000 hrs	
Beam angle	100 Degree	Dimmable	0-10V Dimming	
IColor Temp	3CCT 3000K/4000K/5000K	Lumen Package	3,600 to 13,400 lm	
CRI	70	Warranty	5 Years	
Input Voltage	120-277V	Ambient Operation Temperature	-40°C (-40°F) ~45°C (113°F)	
Installation	Wall mount	Listing	UL Listed Wet location listed	





LARGE ARCHITECTURAL FULL CUTOFF WALL PACK


Fixture Type:

Project Name

Location:

Date:


Ordering Guide Example: FCWP4L-UW3CCT-95W-EM8-MS01

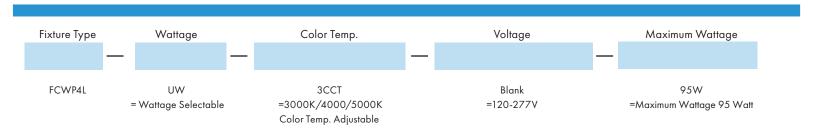

Optional Accessories

backup,

internal pre-install.



= 12/24V Plug and play motion sensor.

FCWP4L- Rev 06-18-2024



LARGE ARCHITECTURAL FULL CUTOFF WALL PACK

Fixture Type:

Project Name

Location:

Date:

Product Information

FCWP4L-95W	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
95W	12,920 lm	136lm/W	13,300 lm	140 lm/W	13,300 lm	140lm/W
76W	10,564 lm	139lm/W	10,944 lm	144lm/W	10,944 lm	144lm/W
57W	8,094 lm	142lm/W	8,436 lm	148lm/W	8,436 lm	148lm/W
38W	5,510 lm	145lm/W	5,738 lm	151lm/W	5,738 lm	1511m/W



LARGE ARCHITECTURAL FULL CUTOFF WALL PACK

Optional Accessories

Emergency Battery Backup:



Fixture Type:

Project Name

Location:

Date:

Internal 8W Emergency Battery Backup SKU: EMBK8W-CNP02

- Internal battery backup is pre-install by request
- 90 minutes emergency operation
- Provide up to 1100 lumen during emergency mode

Motion Sensor:



12/24V DC Plug and play PIR Motion Sensor SKU: BL-ANT6-4T-PIR

- Daylight sensor function and corridor function
- Max. 40ft height
- -Configure setting by remote control (sold separately)
- Factory default setting: 100% sensitivity, Hold on time: 5min daylight sensor is 30 lux, dimming level:30%, dimming time: 60mins.

Photocell:



Button Photocell

SKU: WPPC

- Photocell enables the fixture to turn on at dusk and off at dawn.
- Reduce energy consumption and extends fixture life span.
- Factory internal pre-install by request.