

ARCHITECTURAL FULL CUTOFF WALL PACK

Fixture Type:

Project Name

Location:

Date:

Features

- -Innovative architectural full cutoff wall pack, designed with the latest LED technology.
- -This cutting-edge luminaire offers long lasting, maintenance-free solution, delivering an impressive energy savings of up to 80% compared to metal halide.
- -Featuring wattage selectable and 3CCT color temperature adjustable, allow you to customize the wattage and CCT on-site to suit your specific lighting needs.
- -Premium powder coat dark bronze finish provides resistance to corrosion and weathering.
- -PIR motion sensor and internal emergency battery backup available.
- -Suitable for wet location














Dimensions







Net Weight: 45W: 5.92lb

Specification

Material	Seal die casting aluminum housing	Efficacy	Up to 140 lm/W		
Lens	UV stabilized optical grade polymer refractor lenses	LED Life Span	100,000 hrs		
Beam angle	100 Degree	Dimmable	0-10V Dimming		
IColor Temp	3CCT 3000K/4000K/5000K	Lumen Package	2,700 lm to 6,200 lm		
CRI	70	Warranty	10 Years		
Input Voltage	120-277V	Ambient Operation Temperature	-40°C (-40°F) ~45°C (113°F)		
Installation	Wall mount	Listing	UL Listed Wet location listed		

FCWP4- Rev 08-27-2024




ARCHITECTURAL FULL CUTOFF WALL PACK


Fixture Type:	
Project Name	
Location:	
Date:	

Ordering Guide

Example: FCWP4-UW3CCT-45W-EM8-MS01

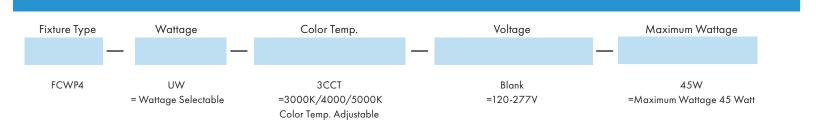

Optional Accessories



EM8 (SKU:EMBK8W-CNPO2) = 8W Emergency battery backup, internal pre-install. MS01 (SKU:BL-ANT6-4T-PIR) = 12/24V Plug and play motion sensor.

MS03 (SKU:HD09V-PIR) =12VDC Plug and Play PIR manually setup capable motion sensor 3.5mm audio plug PC (SKU:WPPC) = Button photocell internal preinstall.



ARCHITECTURAL FULL CUTOFF WALL PACK

Fixture Type:	
Project Name	
Location:	
Date:	

Product Information

FCWP4-45W	30	00K	40	000К	50	000K
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
45W	5800lm	129lm/W	6000lm	138lm/W	6200lm	133lm/W
36W	4800lm	133lm/W	4900lm	142lm/W	5100lm	136lm/W
27W	3700lm	137lm/W	3800lm	146lm/W	3950lm	141lm/W
18W	2550lm	142lm/W	2600lm	150lm/W	2700lm	144lm/W



ARCHITECTURAL FULL CUTOFF WALL PACK

Fixture Type:
Project Name
Location:
Date:

Optional Accessories

Emergency Battery Backup:



Internal 8W Emergency Battery Backup SKU: EMBK8W-CNP02

- Internal battery backup is pre-install by request
- 90 minutes emergency operation
- Provide up to 1100 lumen during emergency mode

Motion Sensor:



12/24V DC Plug and play PIR Motion Sensor SKU: BL-ANT6-4T-PIR

- Daylight sensor function and corridor function
- Max. 40ft height
- Configure setting by remote control RC-MS100 (sold separately)
- Factory default setting: 100% sensitivity, Hold on time: 5min daylight sensor is 30 lux, dimming level:30%, dimming time: 60mins.

8 8

PIR Plug and Play Manually Adjustable Motion Sensor 12V 3.5mm audio plug SKU:HD09V-PIR

- 3.5mm audio plug passive infrared motion sensor.
- With daylight harvesting and photocell function.
- The rotating switch is built into the motion sensor and allows you to manually adjust the standby dimming level and hold time without needing a remote control.
- Configure setting by remote control RC-HD05R (sold separately)

Photocell:



Button Photocell SKU: WPPC

- Photocell enables the fixture to turn on at dusk and off at dawn.
- Reduce energy consumption and extends fixture life span.
- Factory internal pre-install by request.